



Architectural Lighting  
Indoor area  
Outdoor area





 [www.facebook.com/masconled/](http://www.facebook.com/masconled/)

 [www.instagram.com/masconled](http://www.instagram.com/masconled)

[info@masconlighting.com](mailto:info@masconlighting.com)




## About US

We are known for innovative and quality lighting products, the trustworthy brand of India. We are the Mascon. Mascon started with an aim to differentiate quality products from the conventional ones. We headed towards creating unique, affordable and reliable products. The company started in the year 2003, with a dream and a strong will to bring the best quality lighting in the market all over India. Seeing the phenomenal response the brand was applied for registration in the year 2007. Through our innovations, we aim to create brighter lives at affordable prices with best quality resources. Our lights are designed with supreme precision and greater skill. We specialise in bringing innovative and unique products to cater different needs of the customers. Customer satisfaction is our main priority. Our lights are of top-notch quality and manufactured using sustainable raw materials. We serve Interiors, Architects, Contractors, builders, Engineers, lighting designers and professionals all across India for residential, commercial, industrial and other markets. Our mission is to fulfill all the lighting needs to a better world. We love to innovate, Hence the tagline INNOVATIVE LIGHTING. Mascon is the one-stop lighting solution for all the lighting needs.





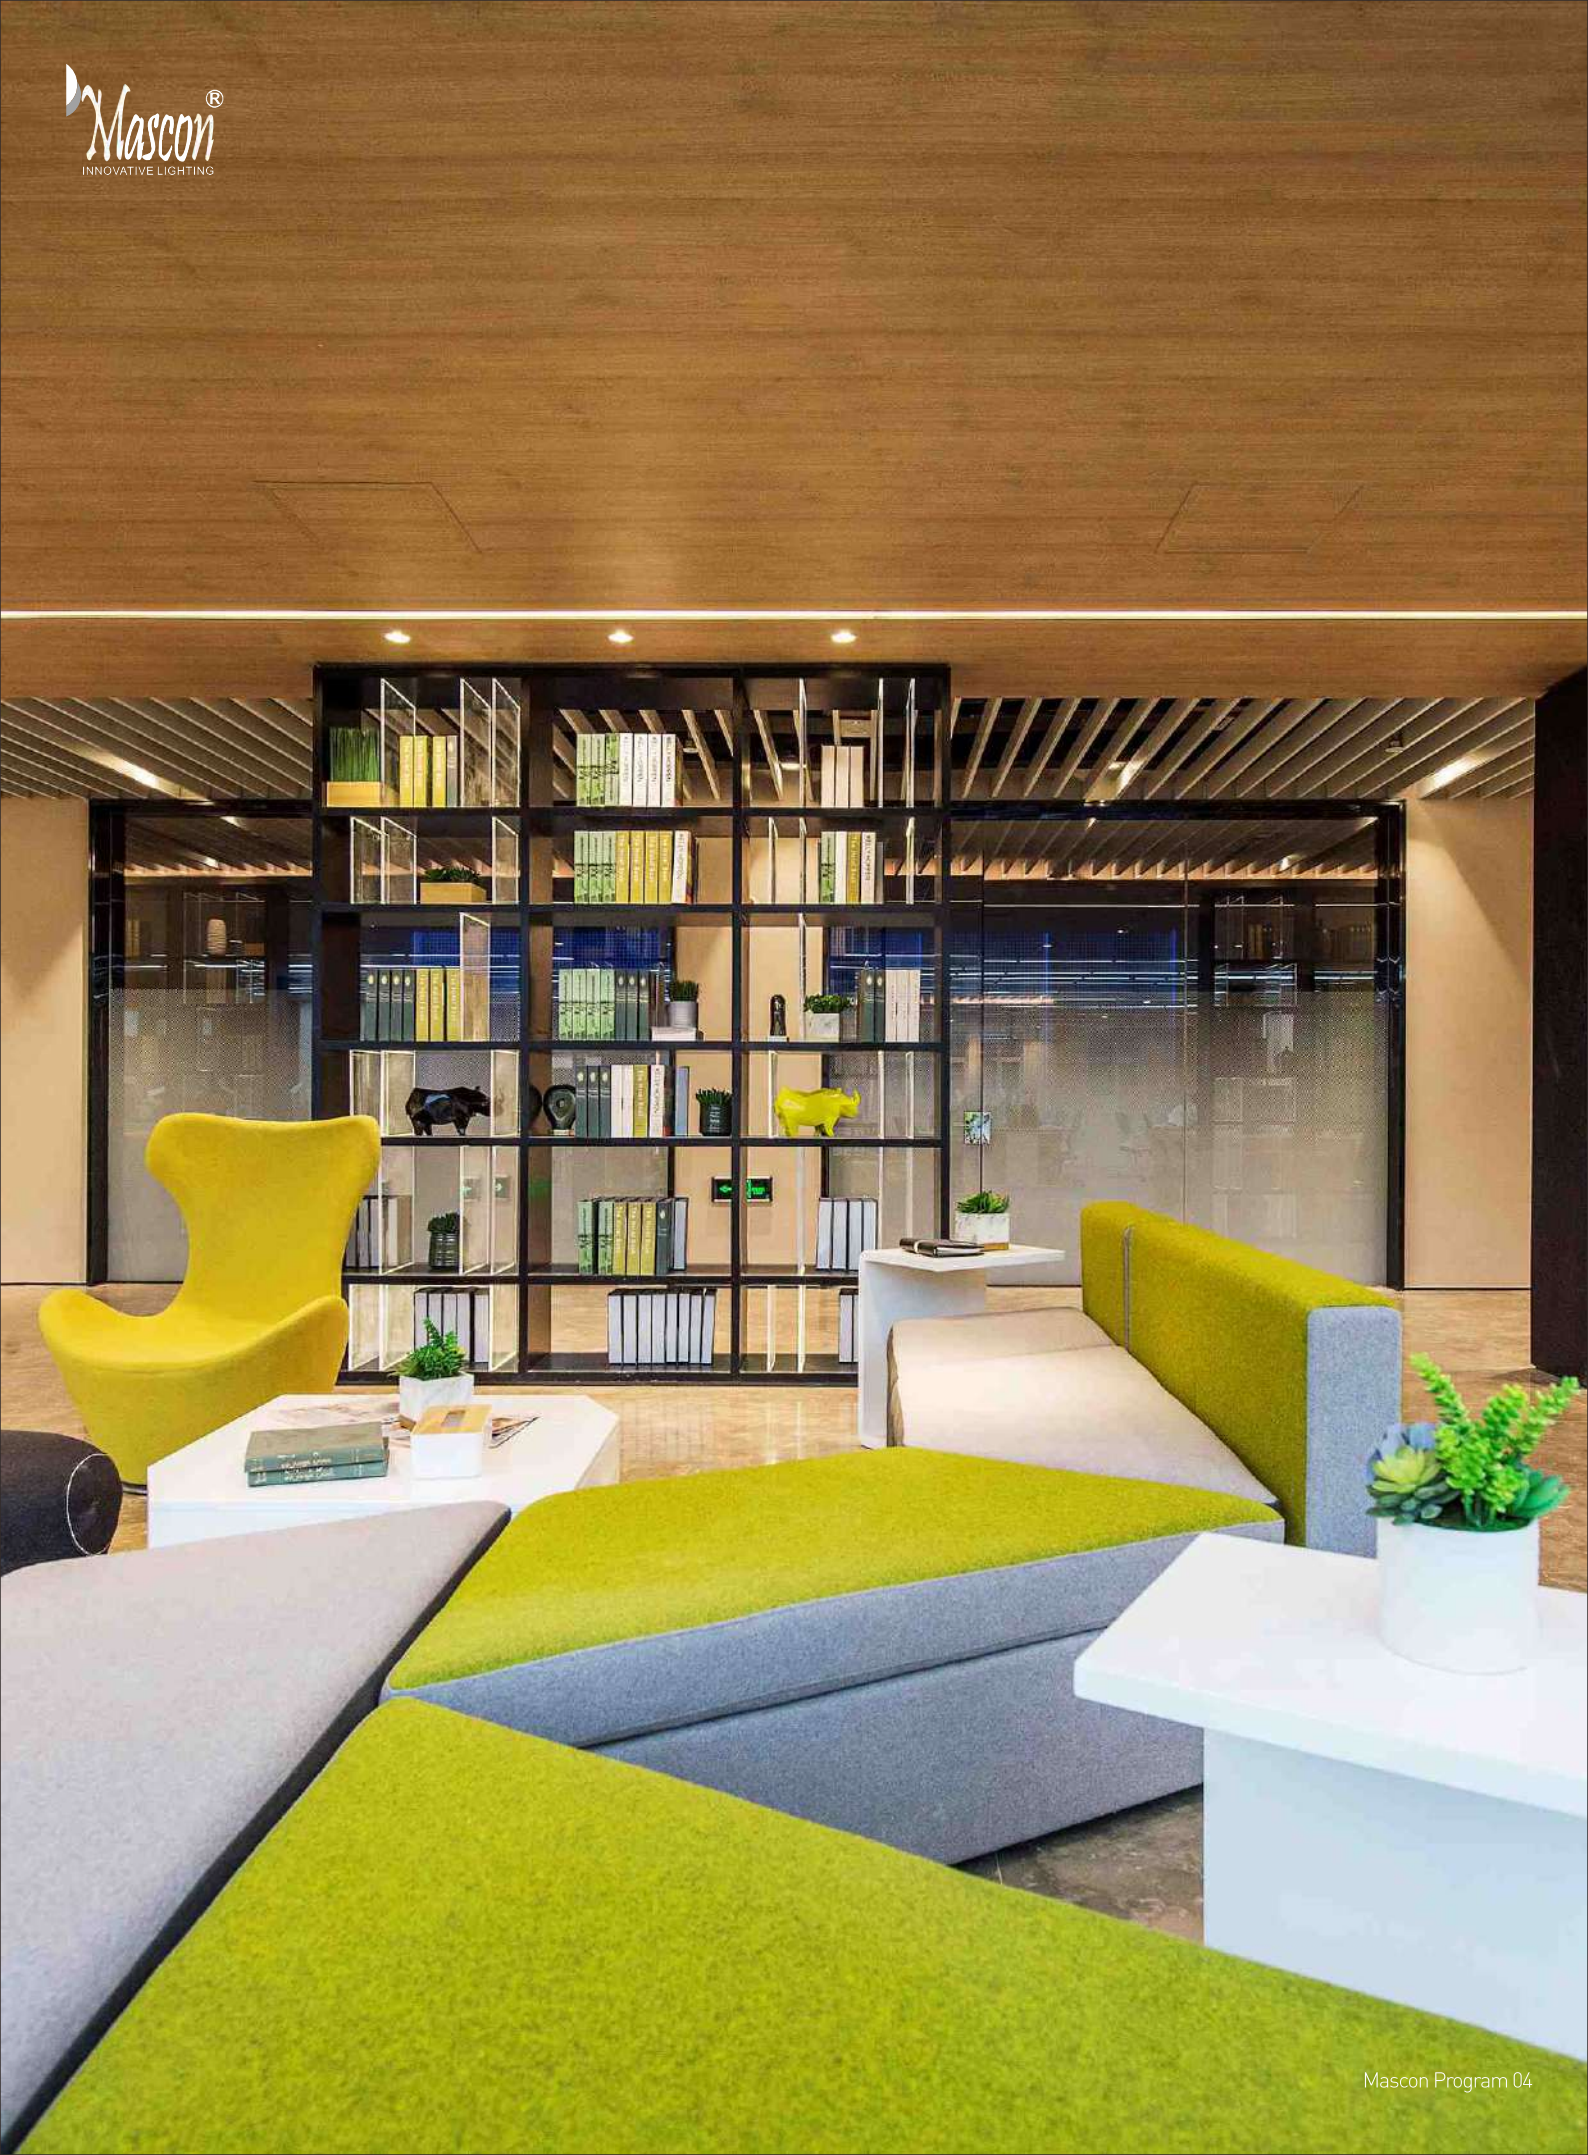



# Product Overview

## Panel lighting systems

---



**SLENDER** Series Page  
16



**SAMSARA** Series Page  
19

## SMD Down lighting systems

---



**PLATINA** Series Page  
23



**AZZARO** Series Page  
26



**FLANNEL** Series Page  
29

## Cob Spot lighting systems

---




**JOOP** Series Page  
33



**KOUROS** Series Page  
35



**JADORE** Series Page  
38



**TRESOR** Series Page  
39



# Product Overview

## Cob Spot lighting systems



**ODIN**  
Series Page  
42



**PRIVE**  
Series Page  
43



**ROCACO**  
Series Page  
46



**ROCHAS**  
Series Page  
47



**LANVIN**  
Series Page  
49



**ORRIS**  
Series Page  
51

## Laser lighting systems



**LANCOME**  
Laser Blade Series Page  
54



**LANCOME**  
Laser Blade Spot Series Page  
55



**LANCOME**  
Laser Wall Washer Series Page  
56



**LOMANI**  
Laser Blade Spot Series Page  
58



**LOMANI**  
Laser Blade Spot Series Page  
60



**LOVANCE**  
Lasser Surface Series Page  
64



**LORENZO**  
LED ZOOM LIGHT Series Page  
66

# Product Overview

## Cob Surface lighting systems



**ESCADA** Series Page 70



**ESCADA** Series Page 71



**ESCADA** Series Page 73



**EMPORIO** Series Page 74

## Office light systems



**RENTA** Series Page 78



**RENTA** Series Page 78



**RENTA** Office Light Series Page 80

## Track/Wall Spot lighting systems



**AMOR** Track spot Series Page 84



**AMOR** Wall spot Series Page 85



**AERIN** Track spot Series Page 86



**AERIN** Wall spot Series Page 87

# Product Overview

## Strip lighting systems



**FLORA**  
LED STRIP    Page 89



**FLORA**  
LED STRIP    Page 89



**FLORA**  
NEON    Page 90

## Led Lamps systems



**FILAMENT LAMPS**    Series    Page 91

## LED Driver systems



**P.C Driver**  
Series    Page 93



**RF LED Driver**  
Series    Page 94



**CANDY**  
Series    Page 96



**CANDY**  
OUTDOOR DRIVER    Page 98

# Product Overview

## Outdoor lighting systems

---



**Foot Light**  
Series Page  
101



**ROXIE**  
Round Series Page  
103



**ROXIE**  
Square Series Page  
103



**ESTEE**  
Square Series Page  
105



**ESTEE**  
Round Series Page  
105



**TALMA**  
Round Series Page  
107



**TALMA**  
Square Series Page  
107



**FUBU**  
Square Series Page  
107



**FLOAM**  
Series Page  
109



**FLOAM**  
Series Page  
109



**FLOAM**  
Series Page  
109



**FLOAM**  
Series Page  
109



**MEOW**  
Series Page  
113



**MEOW**  
Series Page  
113



**MEOW**  
Series Page  
113



**JOVOY**  
Series Page  
111

# Product Overview



**ONAZI**  
Series Page  
111



**LABO**  
Series Page  
115



**LABO**  
Series Page  
115



**HUGO**  
Series Page  
115



**HUGO**  
Series Page  
115



**BULKHEAD**  
Series Page  
115



**ZOLTAN**  
Series Page  
117



**FANDISI**  
Series Page  
117



**SEPHORA**  
Series Page  
118



**LAMOUR**  
Series Page  
118

## Flood/Street lighting systems



**CONTESSA**  
Flood Light Series Page  
120



**CAPUCCI**  
Flood Light Series Page  
122



**CABOTINE**  
Street Light Series Page  
124

## Aluminum Profile



**ALUMINUM PROFILE**  
Series Page  
125



# Panel lighting systems



## LED ULTRA SLIM PANEL - **SLENDER SERIES**

<p>LED BRAND</p> <p><b>Epistar</b></p>	<p>BEAM ANGLE</p> <p><b>120°</b></p>	<p>COLOR TEMP</p> <p><b>WH/NW/WW</b></p> <p>WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
--	--------------------------------------	---	--

Sturdy built ultra slim panel light. Body made of fine aluminum bundled with shockproof PC detachable driver upto 2.5Kva surge protection. High lumen output (Upto 110Lumen/wt) 2835 series EPISTAR side mounted LED PCB delivers supreme diffused light output. Dont just light up your spaces, light up ur dreams.Applications: Homes, Offices, Schools, Hospitals, Etc


# SLENDER Round slim panel lights

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80




ML-A011 RD



ML-A012 RD



ML-A013 RD



ML-A014 RD

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-A011 RD	8W	Epistar	720lm	PF≥0.6	WH/NW/WW	120°	φ88x23mm	φ75mm
ML-A012 RD	15W	Epistar	1350lm	PF≥0.95	WH/NW/WW	120°	φ145x23mm	φ130mm
ML-A013 RD	22W	Epistar	1980lm	PF≥0.95	WH/NW/WW	120°	φ170x23mm	φ155mm
ML-A014 RD	30W	Epistar	2700lm	PF≥0.95	WH/NW/WW	120°	φ221x23mm	φ200mm









## SLENDER Round slim panel lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-A011 SQ	8W	Epistar	720lm	PF≥0.6	WH/NW/WW	120°	88x88x23mm	75x75mm
ML-A012 SQ	15W	Epistar	1350lm	PF≥0.95	WH/NW/WW	120°	145x145x23mm	130x130mm
ML-A013 SQ	22W	Epistar	1980lm	PF≥0.95	WH/NW/WW	120°	170x170x23mm	155x155mm
ML-A014 SQ	30W	Epistar	2700lm	PF≥0.95	WH/NW/WW	120°	221x221x23mm	200x200mm
ML-A008 SQ	48W	Epistar	4550lm	PF≥0.95	WH/NW/WW	120°	600x600x8mm	595x595mm



## LED SURFACE PANEL - SAMSARA SERIES

<p>LED BRAND</p> <p><b>Epistar</b></p>	<p>BEAM ANGLE</p> <p><b>120°</b></p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
--	--------------------------------------	--	--

Sturdy built ultra slim panel light. Body made of fine aluminum bundled with shockproof PC detachable driver upto 2.5Kva surge protection. High lumen output (Upto 110Lumen/wt) 2835 series EPISTAR side mounted LED PCB delivers supreme diffused light output. Dont just light up your spaces, light up ur dreams.Applications: Homes, Offices, Schools, Hospitals, Etc



# SAMSARA Round surface panel lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-B011 RD	8W	Epistar	720lm	PF $\geq$ 0.6	WH/NW/WW	120°	$\phi$ 88x25mm
ML-B012 RD	15W	Epistar	1350lm	PF $\geq$ 0.95	WH/NW/WW	120°	$\phi$ 145x25mm
ML-B013 RD	22W	Epistar	1980lm	PF $\geq$ 0.95	WH/NW/WW	120°	$\phi$ 170x25mm
ML-B014 RD	30W	Epistar	2700lm	PF $\geq$ 0.95	WH/NW/WW	120°	$\phi$ 221x25mm





# SAMSARA Round surface panel lights

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-B011 SQ	8W	Epistar	720lm	PF $\geq$ 0.6	WH/NW/WW	120°	88x88x25mm
ML-B012 SQ	15W	Epistar	1350lm	PF $\geq$ 0.95	WH/NW/WW	120°	145x145x25mm
ML-B013 SQ	22W	Epistar	1980lm	PF $\geq$ 0.95	WH/NW/WW	120°	170x170x25mm
ML-B014 SQ	30W	Epistar	2700lm	PF $\geq$ 0.95	WH/NW/WW	120°	221x221x25mm



## SMD down lighting systems

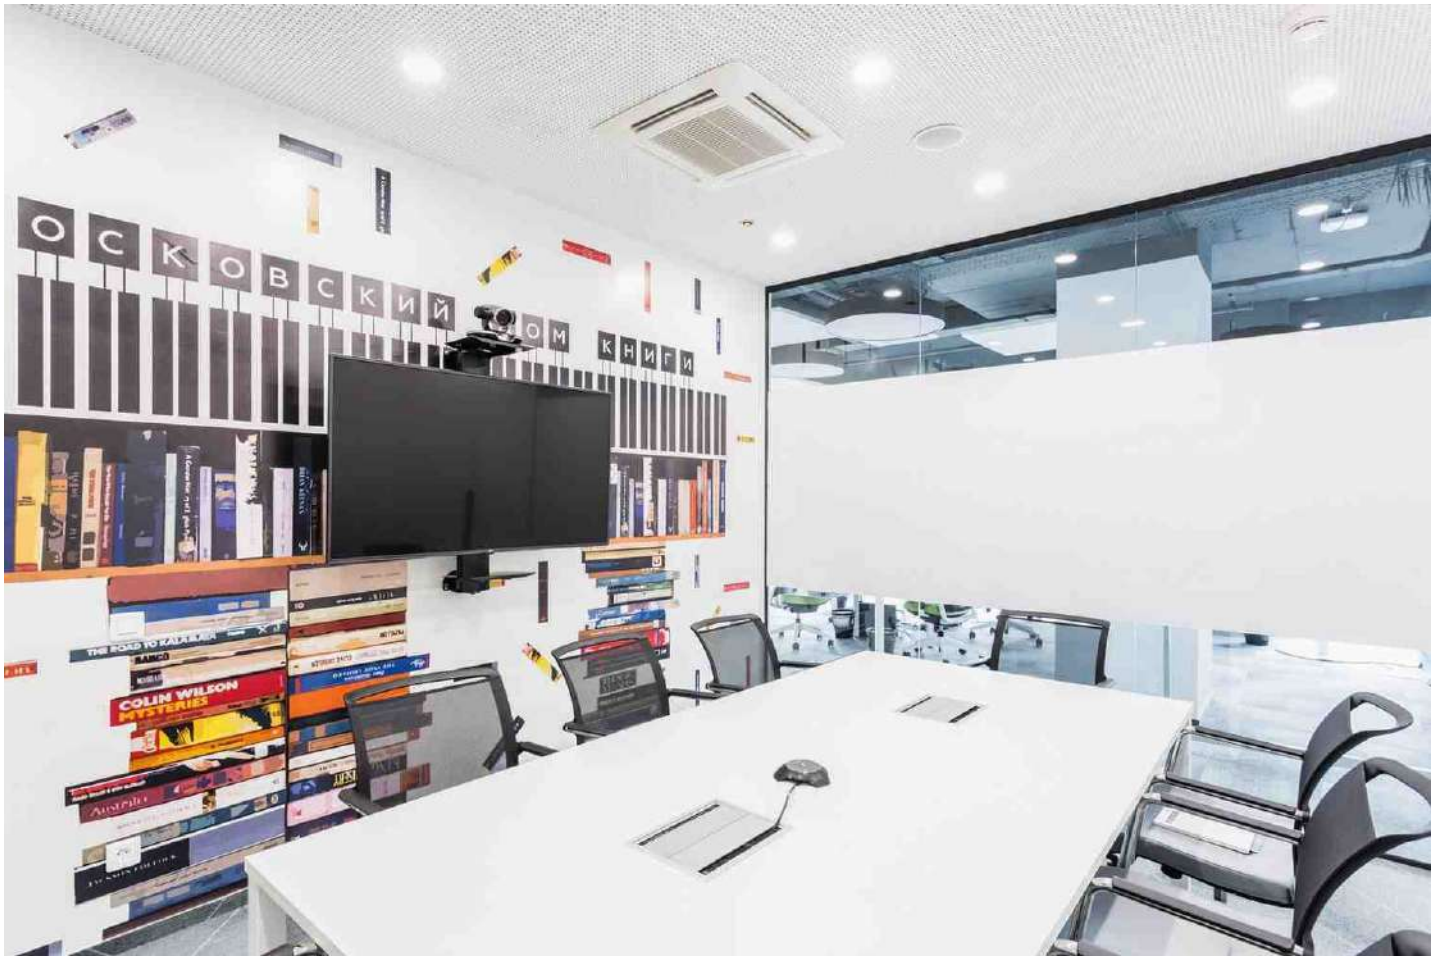

## LED SMD DOWN LIGHT - PLATINA SERIES

LED BRAND <b>Epistar</b>	BEAM ANGLE <b>110°</b>	COLOR TEMP WH/NW/WW WW(3000k) WN(4000k) WH(6000k)	WARRANTY <b>24Months</b>
-----------------------------	---------------------------	---	-----------------------------

Sturdy built ultra slim panel light. Body made of fine aluminum bundled with shockproof PC detachable driver upto 2.5Kva surge protection. High lumen output (Upto 110Lumen/wt) 2835 Series EPISTAR back light LED PCB. delivers supreme diffused light output. Dont just light up your spaces, light up ur dreams.Applications: Homes, Offices, Schools, Hospitals, Etc

# PLATINA<sup>LED</sup> SMD down lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-D111 RD	6W	Epistar	660lm	PF≥0.6	WH/NW/WW	110°	φ90x35mm	φ75mm
ML-D112 RD	12W	Epistar	1320lm	PF≥0.95	WH/NW/WW	110°	φ120*30mm	φ110mm
ML-D113 RD	18W	Epistar	1980lm	PF≥0.95	WH/NW/WW	110°	φ172x30mm	φ155mm
ML-D114 RD	24W	Epistar	2640lm	PF≥0.95	WH/NW/WW	110°	φ225*30mm	φ210mm

# PLATINA<sup>LED</sup> SMD down lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-D111 SQ	6W	Epistar	660lm	PF≥0.6	WH/NW/WW	110°	90x90x35mm	75x75mm
ML-D112 SQ	12W	Epistar	1320lm	PF≥0.95	WH/NW/WW	110°	120x120x30mm	110x110mm
ML-D113 SQ	18W	Epistar	1980lm	PF≥0.95	WH/NW/WW	110°	172x172x30mm	155x155mm
ML-D114 SQ	24W	Epistar	2640lm	PF≥0.95	WH/NW/WW	110°	225x225x30mm	210x210mm





LED SMD DOWN LIGHT - AZZARO SERIES

LED BRAND

Epistar

BEAM ANGLE

110°

COLOR TEMP  
WH/NW/WW

WW(3000k)  
WN(4000k)  
WH(6000k)

WARRANTY

24Months

Backlight mounted aluminum pcb with high lumen output of 110lm/wt Epistar LED. Slimmest bezel of less than even 5mm. Best in class heavy aluminum body for perfect heat dissipation. Enhances any atmosphere with a beautiful spread & even lighting. Premium Mitsubishi acrylic diffuser for ample diffusion of light. Battery type link driver for easy installation and replacements. Applications: Commercial Spaces, Schools, Retail Stores, Etc



# AZZARO<sup>LED</sup> SMD down lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-D115 RD	8W	Epistar	720lm	PF≥0.6	WH/NW/WW	110°	φ103x35mm	φ95mm
ML-D116 RD	15W	Epistar	1400lm	PF≥0.95	WH/NW/WW	110°	φ146x35mm	φ140mm
ML-D117 RD	22W	Epistar	1980lm	PF≥0.95	WH/NW/WW	110°	φ170x35mm	φ165mm




# AZZARO<sup>LED</sup> SMD down lights

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

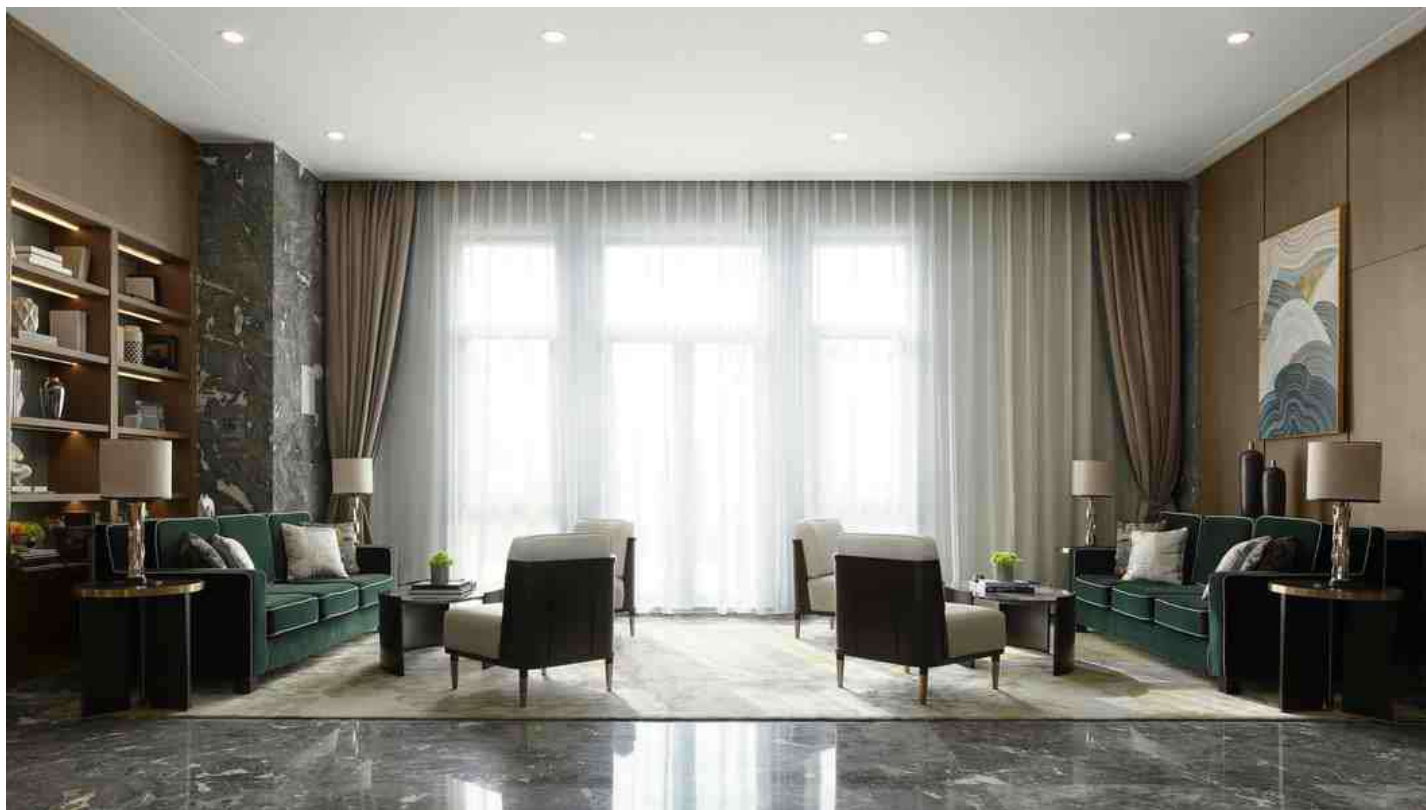

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-D115 SQ	8W	Epistar	720lm	PF <sub>≥</sub> 0.6	WH/NW/WW	110°	103x103x35mm	95x95mm
ML-D116 SQ	15W	Epistar	1400lm	PF <sub>≥</sub> 0.95	WH/NW/WW	110°	146x146x35mm	140x140mm
ML-D117 SQ	22W	Epistar	1980lm	PF <sub>≥</sub> 0.95	WH/NW/WW	110°	170x170x35mm	165x165mm

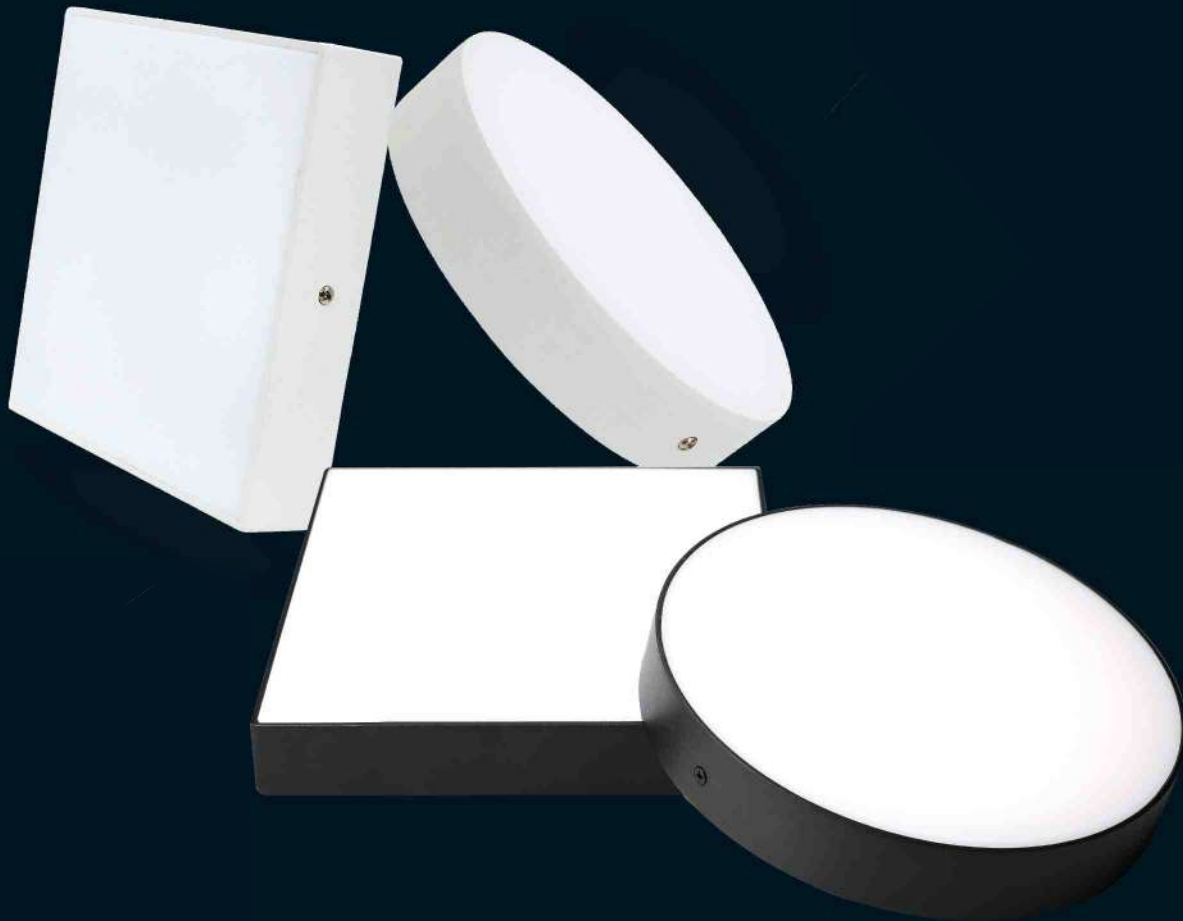

## LED SMD SURFACE LIGHT - FLANNEL SERIES

<p>LED BRAND</p> <p><b>Epistar</b></p>	<p>BEAM ANGLE</p> <p><b>110°</b></p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
--	--------------------------------------	--	--

Backlight mounted aluminum pcb with high lumen output of 110lm/wt Epistar LED. Slimmest bezel of less than even 4mm. Best in class heavy aluminum body for perfect heat dissipation. Enhances any atmosphere with a beautiful spread & even lighting. Premium Mitsubishi acrylic diffuser for ample diffusion of light. Applications: Commercial Spaces , Retail Stores, Offices, Etc






# FLANNEL LED SMD surface lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

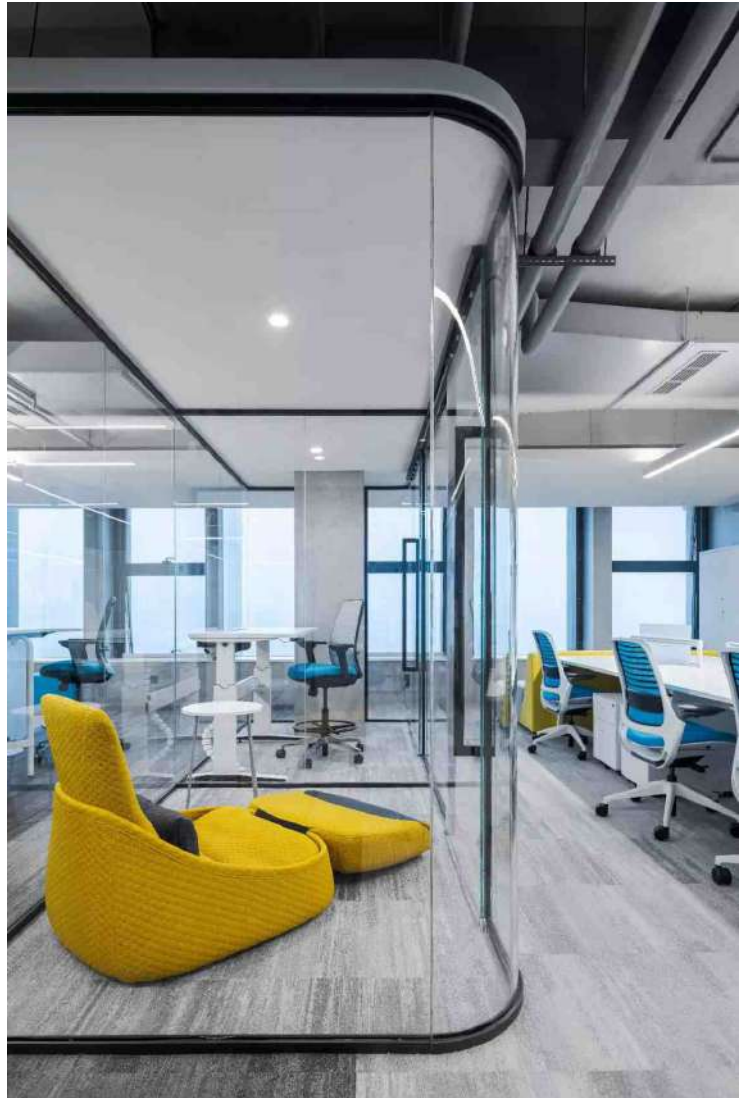

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-B015 RD	16W	Epistar	1600lm	PF≥0.95	WH/NW/WW	110°	φ120x36mm
ML-B016 RD	24W	Epistar	2400lm	PF≥0.95	WH/NW/WW	110°	φ175x36mm
ML-B017 RD	32W	Epistar	3200lm	PF≥0.95	WH/NW/WW	110°	φ225x36mm
ML-B018 RD	48W	Epistar	4800lm	PF≥0.95	WH/NW/WW	110°	φ300x36mm





# FLANNEL LED SMD surface lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

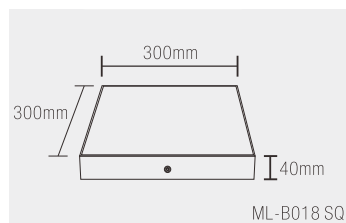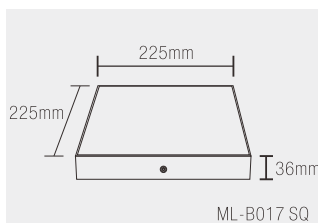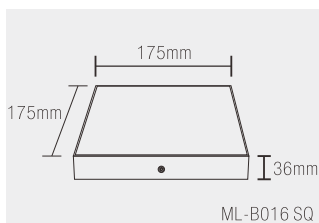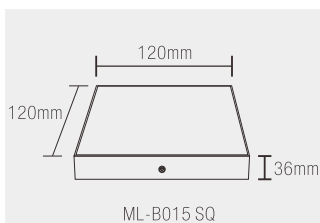

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-B015 SQ	16W	Epistar	1600lm	PF≥0.95	WH/NW/WW	110°	120x120x36mm
ML-B016 SQ	24W	Epistar	2400lm	PF≥0.95	WH/NW/WW	110°	175x175x36mm
ML-B017 SQ	32W	Epistar	3200lm	PF≥0.95	WH/NW/WW	110°	225x225x36mm
ML-B018 SQ	48W	Epistar	4800lm	PF≥0.95	WH/NW/WW	110°	300x300x40mm

# Cob spot lighting systems





## COB SPOT LIGHT- JOOP SERIES

<p>LED BRAND</p> <p><b>Epistar CREE</b></p>	<p>BEAM ANGLE</p> <p><b>38°</b></p>	<p>COLOR TEMP</p> <p><b>WH/NW/WW</b></p> <p>WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
---	-------------------------------------	---	--

LED JOOP SERIES Tiny spotlight fixtures give the best of gaze to a place. They completely change the way a particular environment looks like. They might be tiny but they never go unnoticed. They add a tinge of royalty to any space they are installed at. Subtle lighting at its best. Elegantly designed fixtures with a wide variety of options. Applications: Apartments, Showcases, Bars, Discos, etc



Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
≥83%

IP rating  
IP20


CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C133	3W	Epistar	240lm	PF≥0.6	WH/NW/WW	38°	φ40x45mm	φ33mm
ML-C134	3W	Epistar	240lm	PF≥0.6	WH/NW/WW	38°	φ42x39mm	φ35mm
ML-C135	3W	Epistar	240lm	PF≥0.6	WH/NW/WW	38°	φ40x45mm	φ35mm
ML-C136	3W	Epistar	240lm	PF≥0.6	WH/NW/WW	38°	φ58x25mm	φ45mm
ML-C137	5W	Cree	410lm	PF≥0.6	WH/NW/WW	38°	φ50x55mm	φ45mm
ML-C140	2W	Cree	150lm	PF≥0.6	WH/WW	38°	φ40x35mm	φ34mm
ML-C140 SS	2W	Cree	150lm	PF≥0.6	WH/WW	38°	φ40x35mm	φ34mm
ML-C141	5W	Cree	400lm	PF≥0.6	WH/WW	38°	φ50x43mm	φ45mm



## COB SPOT LIGHT- KOUROS SERIES

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

LED KOUROS SERIES Premium, tiltable, recessed COB downlight for the best punchy lighting effect. Premium shinland reflector for maximising light output and glare free lighting. Most sturdy built with CRI >90. Integated with the latest technology Bridgelux chip for best lumen output. This is a total package of pure uncompromised lighting. Highly recommended for any commercial usage. Direction of light can be altered by tilting the fixture. Applications: Retail stores, Malls, Gyms, Restaurants, Etc



# KOUROS<sup>COB</sup> Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80

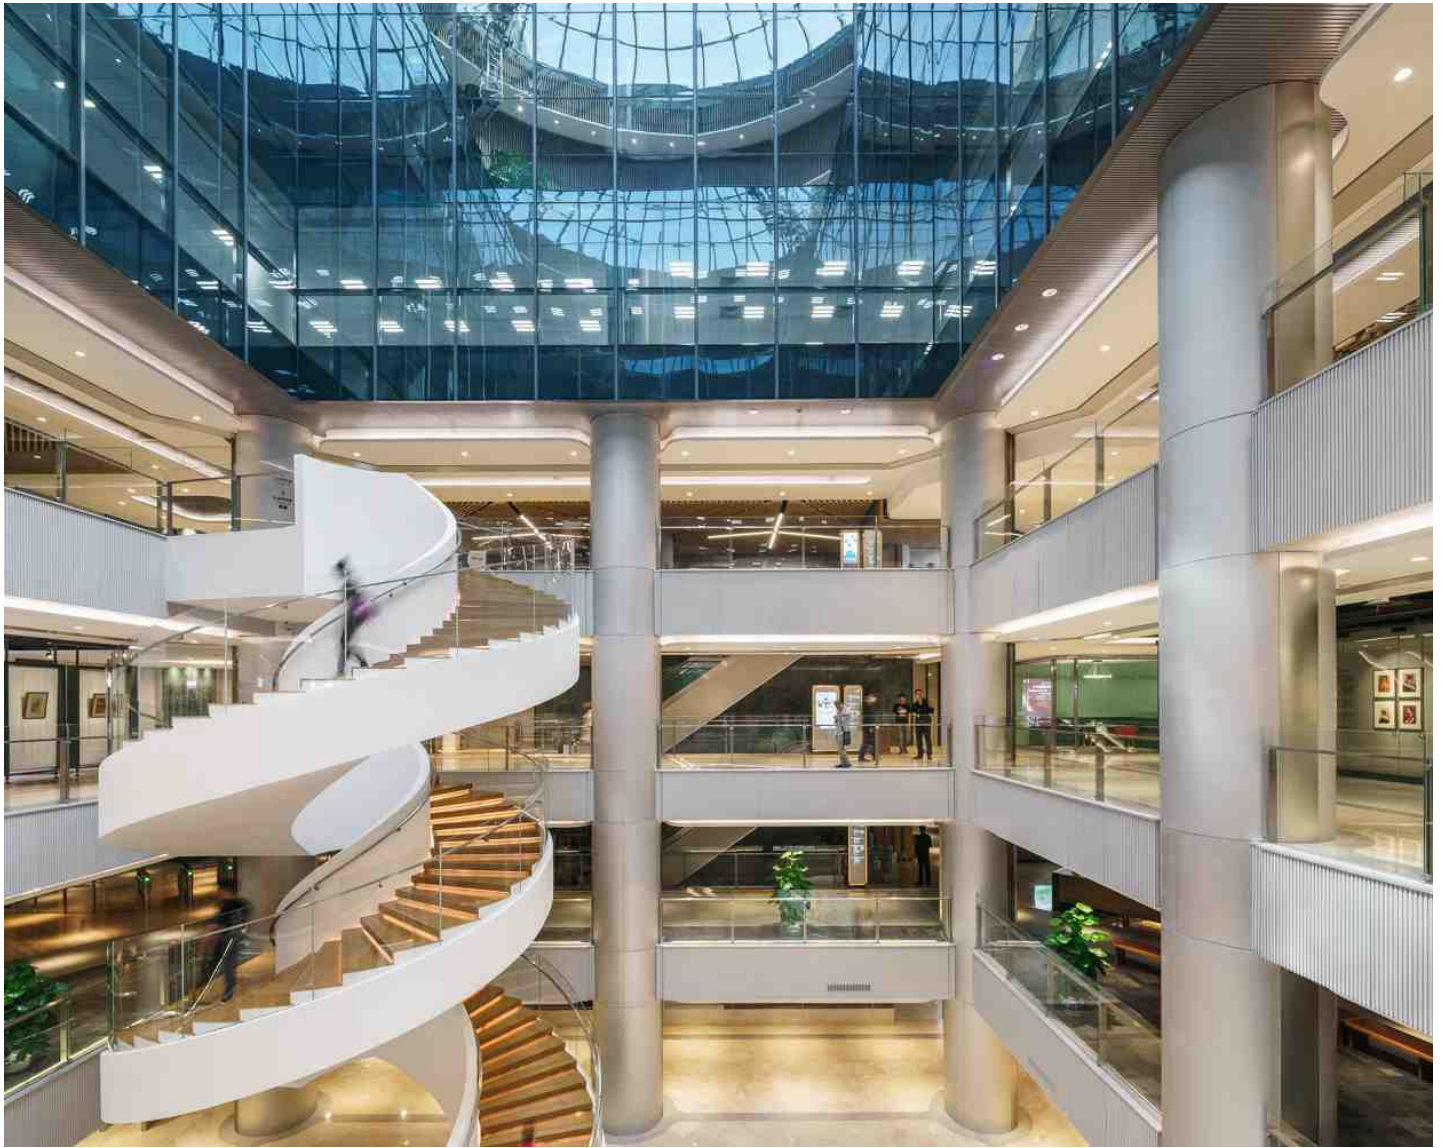

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C142	7W	Bridgeux	550lm	PF≥0.95	WH/NW/WW	38°	φ80x55mm	φ70-75mm
ML-C143	12W	Bridgelux	950lm	PF≥0.95	WH/NW/WW	38°	φ95x70mm	φ80-85mm
ML-C144	20W	Bridgelux	1580lm	PF≥0.95	WH/NW/WW	38°	φ125x90mm	φ115-120mm
ML-C145	30W	Bridgelux	2400lm	PF≥0.95	WH/NW/WW	38°	φ160x98mm	φ140-150mm



## COB SPOT LIGHT- JADORE SERIES

<p>LED BRAND</p>  <p>POWER BY:</p>	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p>24Months</p>
--	------------------------------	--	---------------------------------

Tiny and cute fixture available in a vast range of body colors. Particularly used to create an alluring environment. Looks so charismatic you would be tempted to buy one. Deep recessed source helps it to deliver premium glare free lighting. Aluminum heatsink at the base ensures perfect diffusion of heat. Body made from finest aluminum. Available in Matt Black , PKW , Copper & Gold finishes. Applications: Residents, Offices, Hotels, Etc

# JADORE COB Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz




Typical efficiency:  
≥83%

IP rating  
IP20

CRI:  
>80

Body colour:


- White
- Black
- Rose Gold

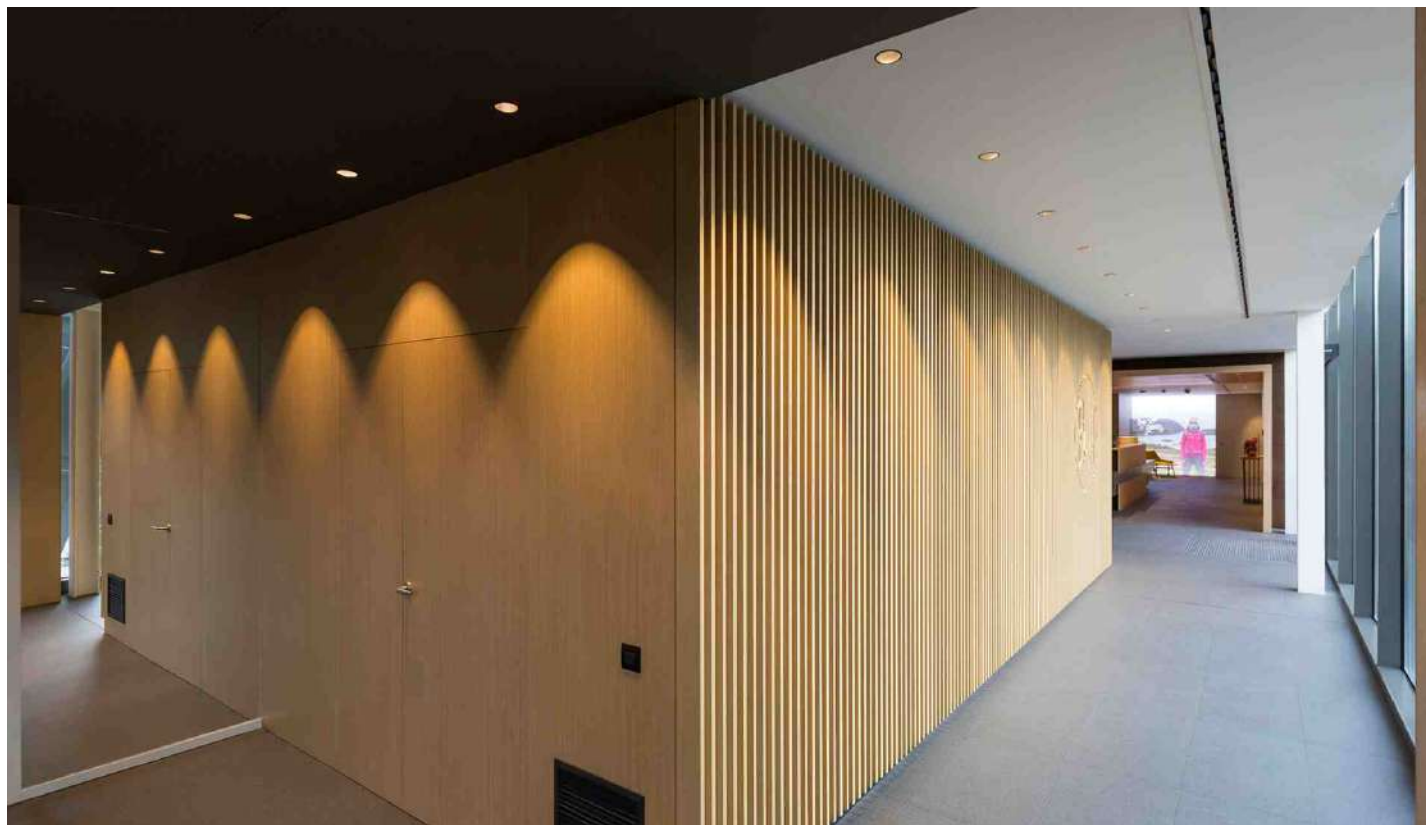

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C151	3W	Bridgelux	240lm	PF≥0.6	WH/NW/WW	38°	φ45x45mm	φ38mm
ML-C152	7W	Bridgelux	595lm	PF≥0.95	WH/NW/WW	38°	φ60x62mm	φ51mm



## COB SPOT LIGHT- TRESOR SERIES

<p>LED BRAND</p>  <p>POWER BY</p>	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

One of the highest selling fixture of the modern times. Looks like its made out of sheer love. This fixture maintains every important aspect considered by designers for what they call a perfect fitting. Deep recessed, Glare-free reflectors, Balanced Lumen, Superior driver , High CRI , Premium aluminum body, Best in class heatsink & many more. Available in Black & PKW body. Reflectors: White , Black , Copper , Gold & Chrome Applications: Hotels, Resorts, Retail Stores, Residence, Etc

# TRESOR<sup>COB</sup> Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%


IP rating  
IP20

CRI:  
>80



Body colour:

- White
- Black
- Rose Gold



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C154	7W	Bridgelux	595lm	PF≥0.95	WH/NW/WW	38°	φ89x90mm	φ78mm
ML-C155	12W	Bridgelux	1020lm	PF≥0.95	WH/NW/WW	38°	φ89x88mm	φ78mm



## COB SPOT LIGHT- ODIN SERIES

<p>LED BRAND</p> <p><b>CREE</b></p>	<p>BEAM ANGLE</p> <p>18°/24° 36°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p>24Months</p>
-------------------------------------	--	--	---------------------------------

Tiny and cute fixture. Particularly used to create an alluring environment. Looks so charismatic you would be tempted to buy one. Deep recessed source helps it to deliver premium glare free lighting. Aluminum heatsink at the base ensures perfect diffusion of heat. Body made from finest aluminum. Inner tilt option for doubling up as a premium wallwasher. Comes with CREE LED for CRI >85 Applications: Showrooms, Retail Stores, Commercial Spaces, Etc.



# ODIN<sup>COB</sup> Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C156	3.1W	Cree	310lm	PF≥0.6	WH/NW/WW	18°	φ35x42mm	φ30mm
ML-C157	8.3W	Cree	910lm	PF≥0.95	WH/NW/WW	24°/38°	φ55x60mm	φ48mm



## COB SPOT LIGHT- PRIVE SERIES

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

Deep recessed Anti-Glare spotlight with one of the most unique designs in the fast moving trendy market. Includes a honeycomb louve for glare free lighting experience. Designed in such a way that the source of light is not visible and also the light output is not compromised. Balanced lumen output with CREE chip for CRI >90. A new show stopper for any designer. Also available with optional EAGLERISE Driver. Available in Matt Black & PKW body. Applications: Malls, Resorts, Hotels, Commercial Offices, Etc

# PRIVE<sup>COB</sup> Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C158	8.3W	Cree	910lm	PF≥0.95	WH/NW/WW	38°	φ72x60mm	φ62mm
ML-C159	13.6W	Cree	1490lm	PF≥0.95	WH/NW/WW	38°	φ88x70mm	φ78mm



## COB SPOT LIGHT- ROCACO SERIES

<p>LED BRAND</p> <p><b>CREE</b></p>	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
-------------------------------------	------------------------------	--	---------------------------------

A new integrated structure design only for a unique beam of light through a new design to improve the heat dissipation system and light attenuation system problems


# ROCACO COB Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz



Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C160 RD	14.3W	Cree	1458lm	PF≥0.95	NW/WW	38°	φ85X93mm	φ75mm
ML-C160 SQ	14.3W	Cree	1458lm	PF≥0.95	NW/WW	38°	85X85X93mm	75X75mm

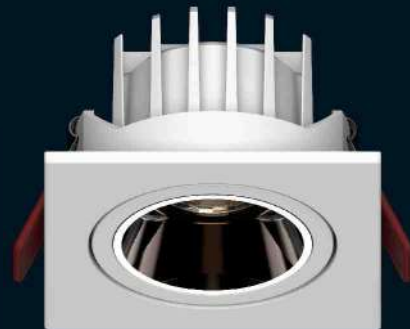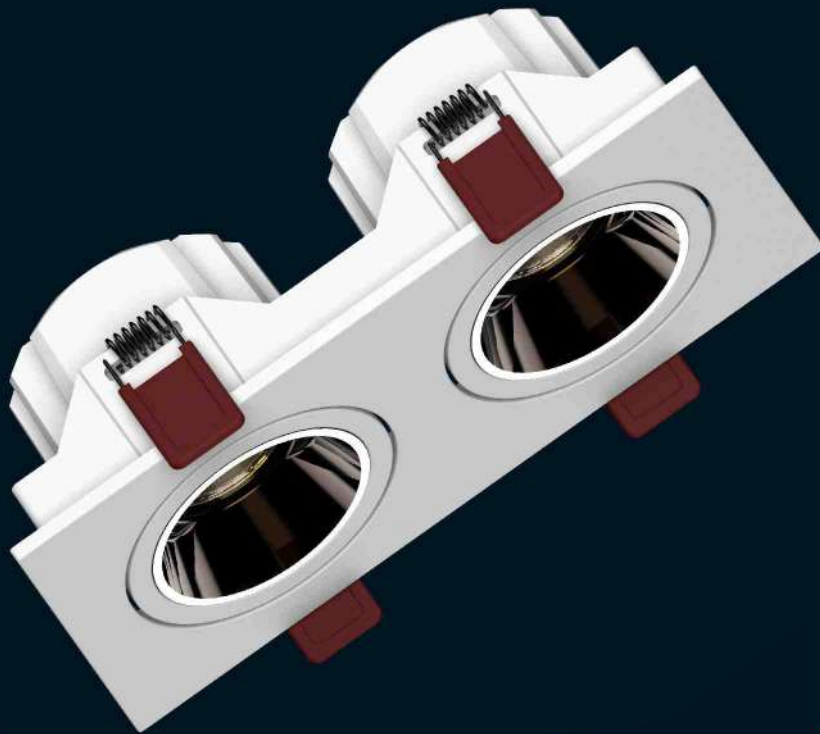

## COB SPOT LIGHT- ROCHAS SERIES

LED BRAND



BEAM ANGLE

38°

COLOR TEMP  
WH/NW/WW

WW[3000k]  
WN[4000k]  
WH[6000k]

WARRANTY

24Months




# ROCHAS COB Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80

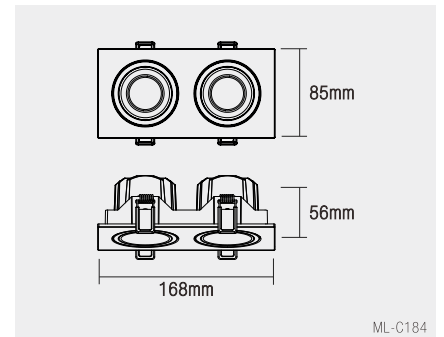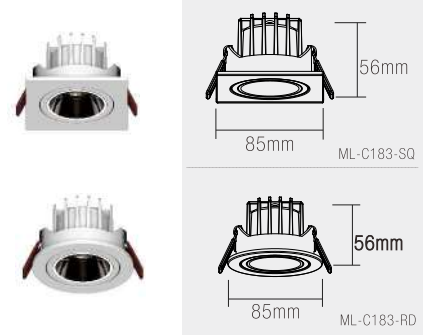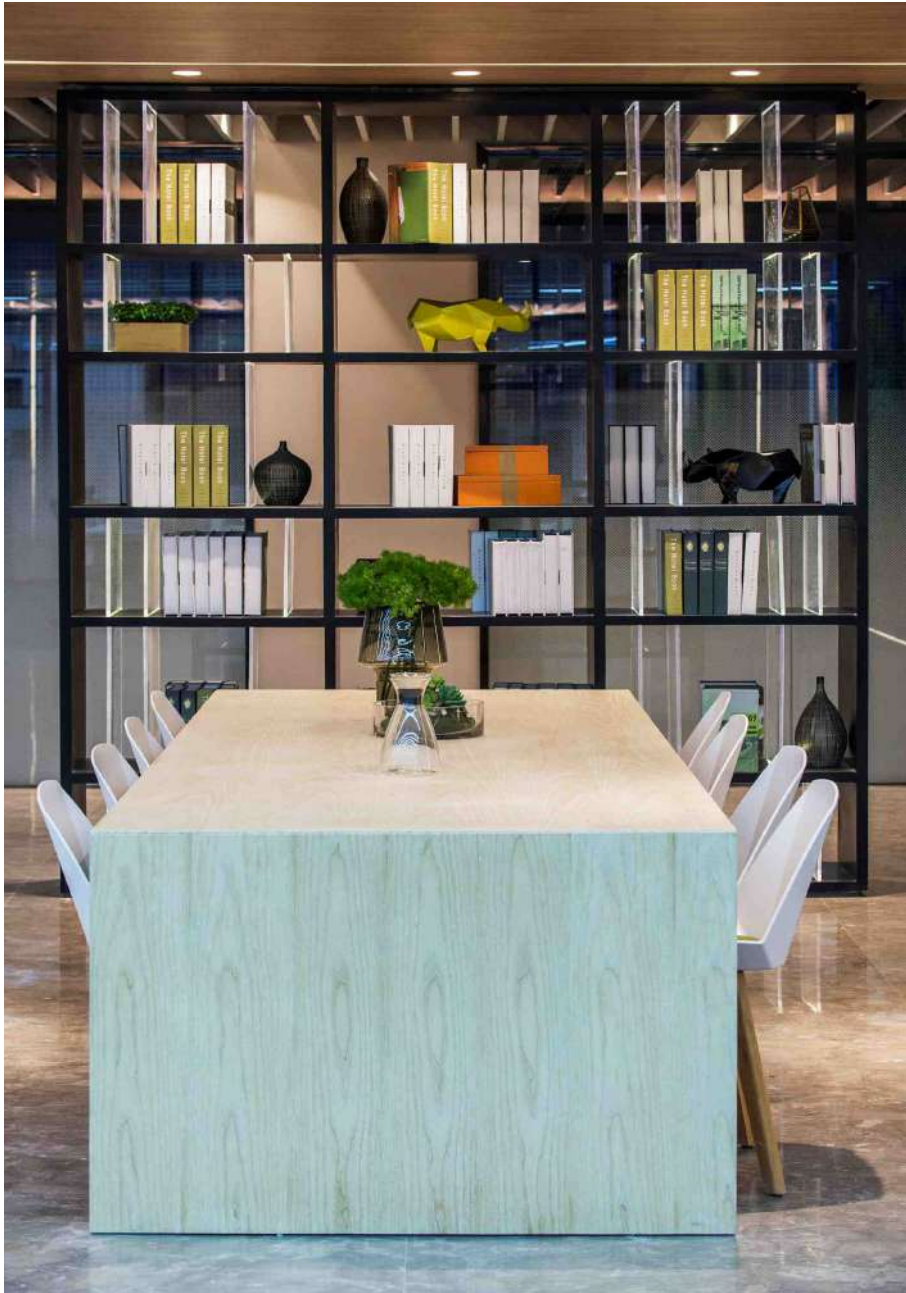

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C183-SQ	12W	CREE	1300lm	PF≥0.95	NW/WW/WH	38°	85*85*56mm	φ75mm
ML-C183-RD	12W	CREE	1300lm	PF≥0.95	NW/WW/WH	38°	φ85*56mm	φ75mm
ML-C184	2*12W	CREE	2600lm	PF≥0.95	NW/WW/WH	38°	168*85*56mm	160*75mm



## COB SPOT LIGHT- LANVIN SERIES

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

Led LANVIN SERIES Lighting has evolved way too much than imagined. These beautiful cylindrical deep recessed funnel lights are sure to impress anybody. Premium lens delivers almost no lumen loss and perfect spotting effect. The funnel can also be turned so as to match the direction and object to be spotted. Complete body made of high grade Aluminum for sturdy built, perfect heat absorption and longevity. Available in single or double set option. Beautiful look, Uncompromised Lighting, Premium effect, what more ? Applications: Jewellery/Clothing stores, Commercial spaces, Art Galleries, Resorts, Etc




Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80

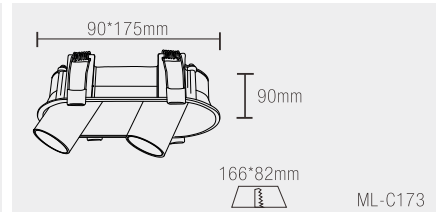

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C172	12W	Bridgelux	1080lm	PF≥0.95	NW/WW	38°	φ90X100mm	φ83mm
ML-C173	2X12W	Bridgelux	2160lm	PF≥0.95	NW/WW	38°	90x175X90mm	166X82mm



## COB SPOT LIGHT- ORRIS SERIES

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>40°</p>	<p>COLOR TEMP</p> <p>WH/NW WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

LED ORRIS SERIES Deep recessed, non tiltable, curvy COB spotlight. The fixture gives an uncompromised deep glowing look as if the light source is embedded inside the POP. Merges very well with any environment. The wide spread enables designers to use this product instead of regular panel lights. Can be used as a primary source of light. These fixtures are popular for a beautiful spread and even lighting effect. Applications: Restaurants, Resorts, Hotels, Housing, Etc.


# ORRIS<sup>COB</sup> Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%


IP rating  
IP20

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C180	7W	Bridgelux	700lm	PF≥0.95	NW/WW	40°	φ70X58mm	φ60mm
ML-C181	12W	Bridgelux	1200lm	PF≥0.95	NW/WW	40°	φ82X65mm	φ75mm



# Laser lighting systems

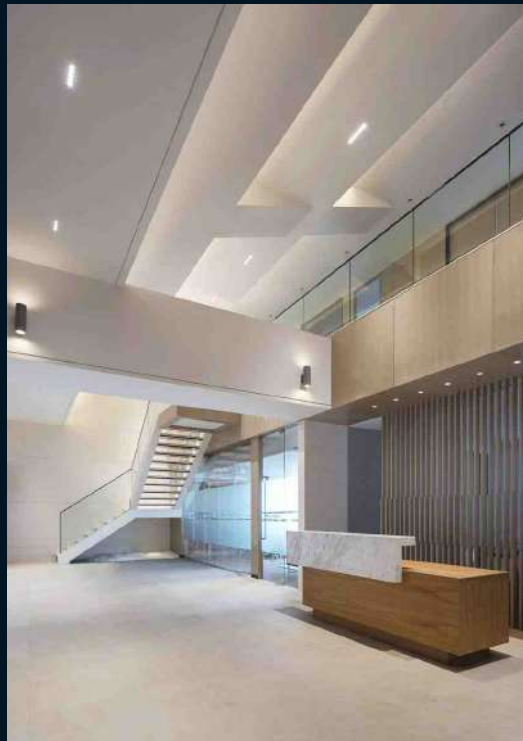

# LACOME LED Laser Blade Light

Input voltage range: AC 85~265V 50/60Hz  
 Typical efficiency: >88%  
 IP rating: IP20  
 CRI: >80

LED BRAND <b>CREE</b>	BEAM ANGLE <b>30°</b>	COLOR TEMP WH/NW/WW WW[3000k] WN[4000k]	WARRANTY <b>24Months</b>
--------------------------	--------------------------	--	-----------------------------

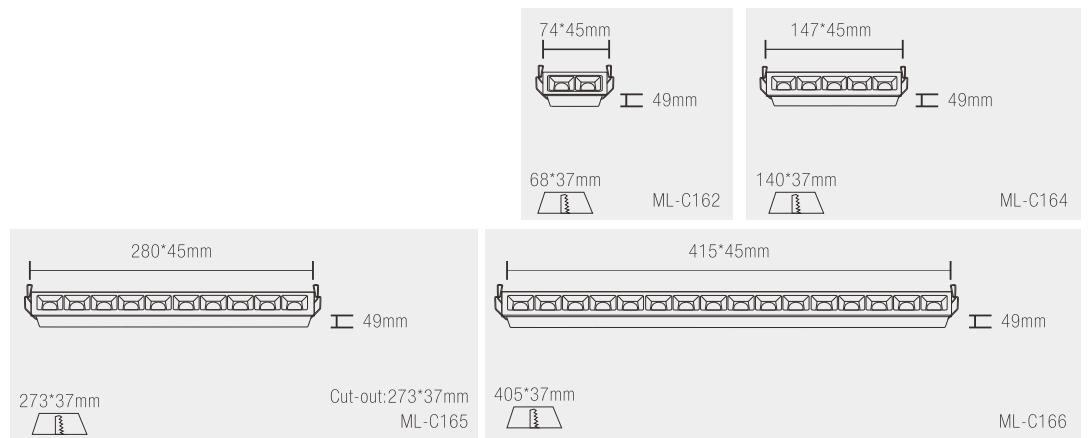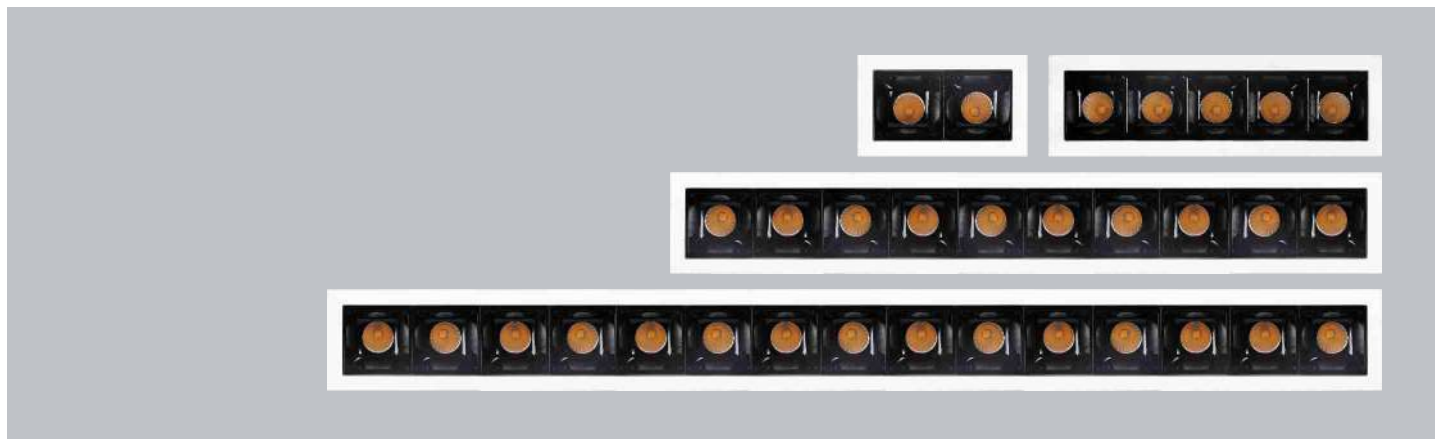

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C162	2x3W	Cree	660lm	PF≥0.95	NW/WW	30°	74x45x49mm	68x37mm
ML-C164	5X3W	Cree	1650lm	PF≥0.95	NW/WW	30°	147x45x49mm	140x37mm
ML-C165	10X3W	Cree	3300lm	PF≥0.95	NW/WW	30°	280x45x49mm	273x37mm
ML-C166	15X3W	Cree	4950lm	PF≥0.95	NW/WW	30°	413x45x49mm	405x37mm




# LACOME<sup>LED</sup> Laser Blade Light

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

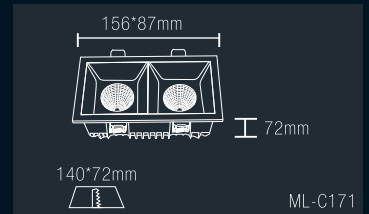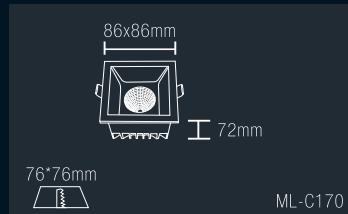

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C170	12W	EPISTAR	1320lm	PF≥0.95	NW/WW	30°	86x86x72mm	76x76mm
ML-C171	2X12W	EPISTAR	3300lm	PF≥0.95	NW/WW	30°	156x87x72mm	140x72mm

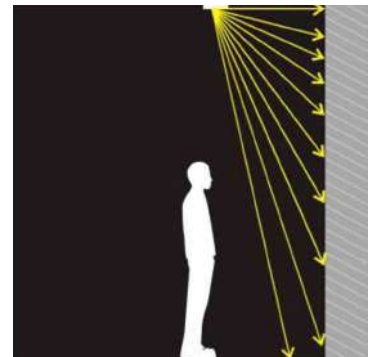

## LASER WALL WASHER LIGHT - LANCOME SERIES

<p>LED BRAND</p> <p><b>CREE</b></p>	<p>BEAM ANGLE</p> <p>WallWash</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] NW[4000k]</p>	<p>WARRANTY</p> <p>24Months</p>
-------------------------------------	-----------------------------------	--	---------------------------------

This fixture has been one of the pioneers of LED technology. It has enabled high quality wallwashing for paintings , frames , showpieces , etc. There is no need for provision of light on wall as this fixture can be recessed on POP and the light focuses on the wall. The light is powerful enough to grab the attention of anything it is focused on and cross enough to not hit the eyes.CREE chip delivers CRI >90 with high quality driver components. Appliance applications: Showrooms, Residence, Art Gallery, Etc




# LACOME<sup>LED</sup> Laser Blade Light

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

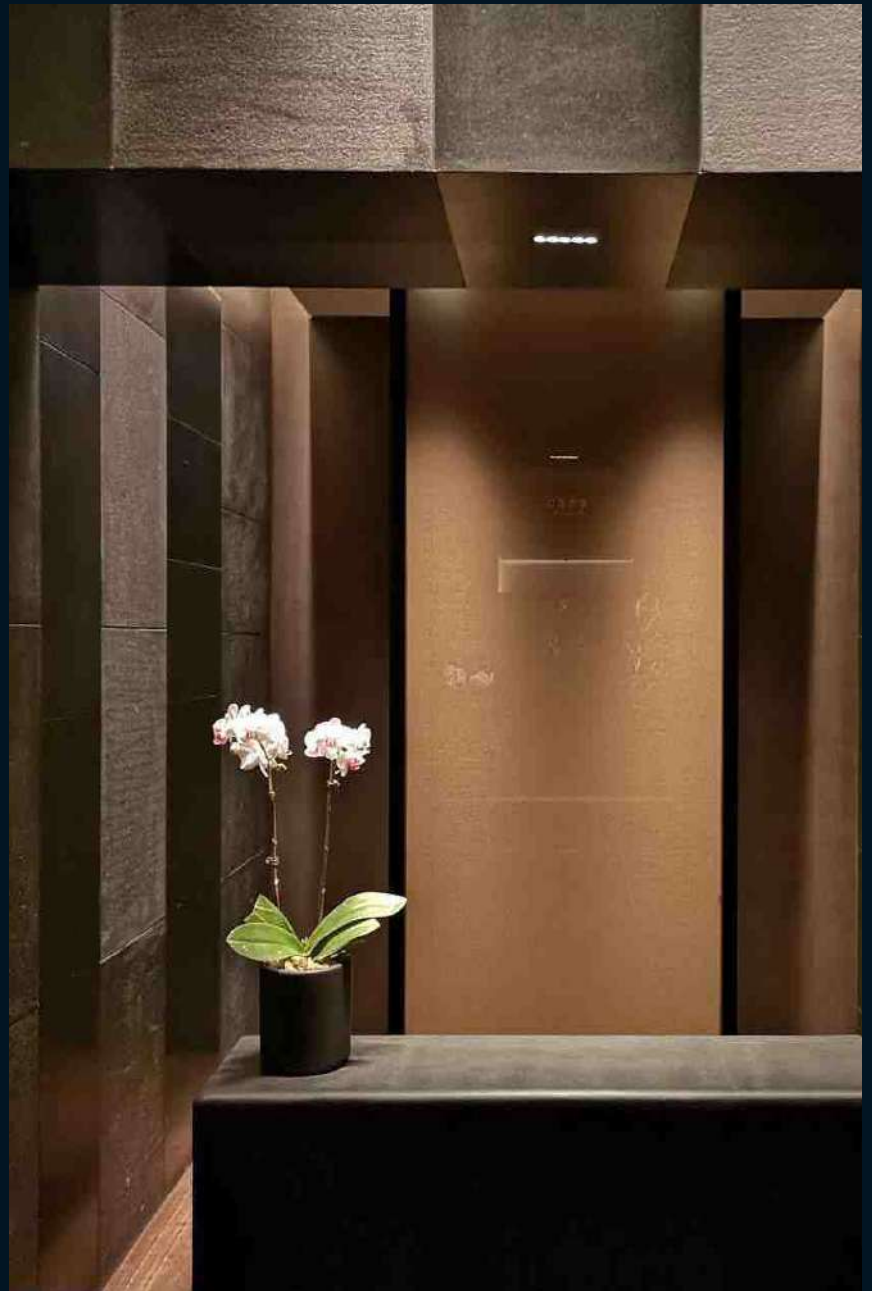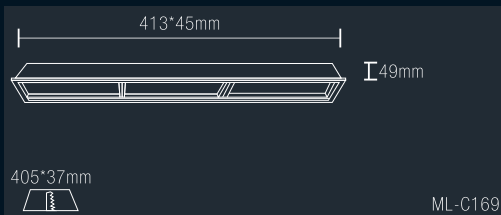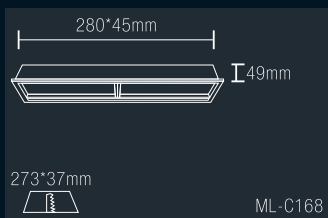

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C167	5X3W	Cree	1650lm	PF≥0.95	NW/WW	WallWash	147x45x49mm	140x37mm
ML-C168	10X3W	Cree	3300lm	PF≥0.95	NW/WW	WallWash	280x45x49mm	273x37mm
ML-C169	15X3W	Cree	4950lm	PF≥0.95	NW/WW	WallWash	413x45x49mm	405x37mm





## LASER BLADE SPOT LIGHT - LAMIS SERIES

<p>LED BRAND</p> <p><b>CREE</b></p>	<p>BEAM ANGLE</p> <p>36°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
-------------------------------------	------------------------------	--	---------------------------------



# LAMIS<sup>LED</sup> Laser Blade Light

Input voltage range:  
AC 85~265V  
50/60Hz



Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

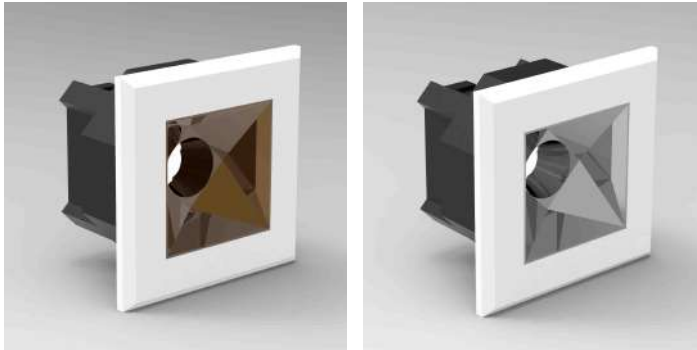

## Optics

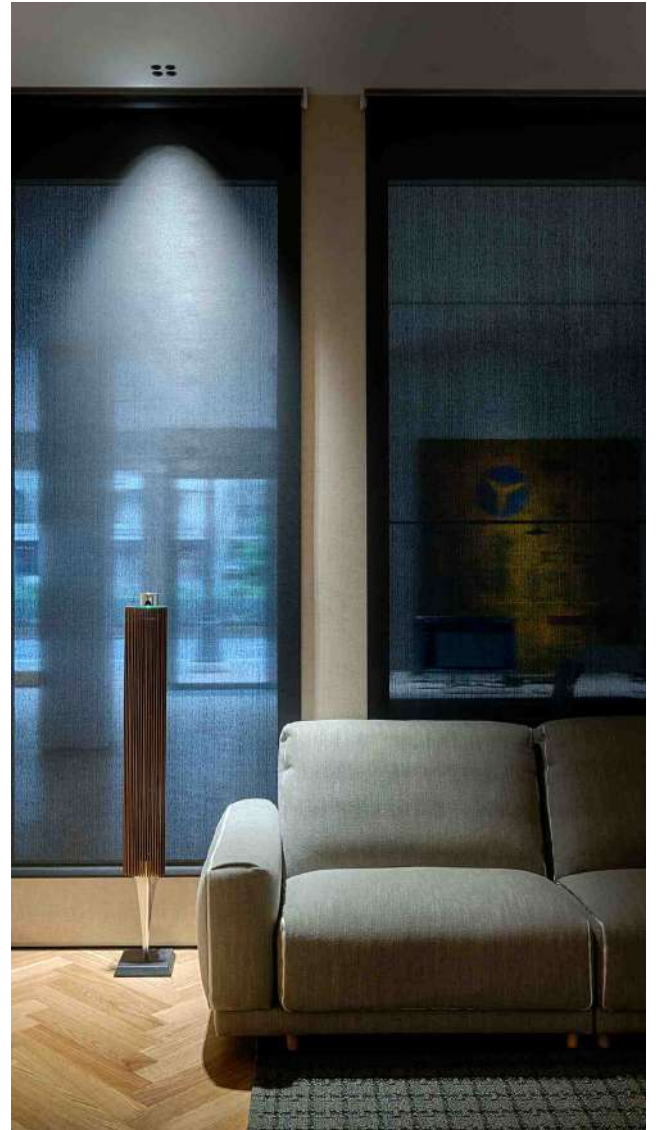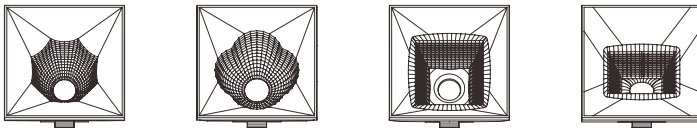

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C174	3W	CREE	310lm	PF≥0.6	NW/WW/WH	36°	92*92*52mm	87*87mm



## LASER BLADE SPOT LIGHT - LOMANI SERIES

LED BRAND <b>CREE</b>	BEAM ANGLE 38°	COLOR TEMP WH/NW/WW WW[3000k] WN[4000k] WH[6000k]	WARRANTY 24Months
--------------------------	-------------------	---	----------------------

# LOMANI<sup>LED</sup> Laser Blade Light

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>90




Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C175	5W	CREE	500lm	PF $\geq$ 0.95	NW/WW/WH	38°	54*54*50mm	49*49mm




Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C177	16W	CREE	1550lm	PF $\geq$ 0.95	NW/WW/WH	38°	92*92*52mm	87*87mm

# LOMANI<sup>LED</sup> Laser Blade Light

Input voltage range: AC 85~265V 50/60Hz	Typical efficiency: >88%	IP rating IP20	CRI: >90
---	-----------------------------	-------------------	-------------

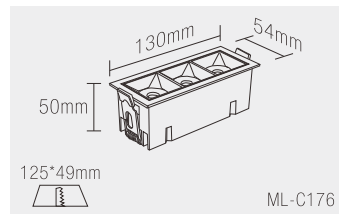

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C176	12W	CREE	1200lm	PF <sub>≥</sub> 0.95	NW/WW/WH	38°	130*54*50mm	125*49mm

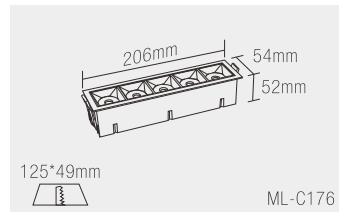

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C178	20W	CREE	2000lm	PF <sub>≥</sub> 0.95	NW/WW/WH	38°	206*54*52mm	201*49mm


# LOMANI<sup>LED</sup> Laser Blade Light

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>90



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-C179	36W	CREE	3500lm	PF <sub>≥</sub> 0.95	NW/WW/WH	38°	130*130*52mm	125*125mm





## LASER BLADE SURFACE SPOT LIGHT - LOVANCE SERIES



LED BRAND <b>CREE</b>	BEAM ANGLE 38°	COLOR TEMP WH/NW/WW WW(3000k) WN(4000k) WH(6000k)	WARRANTY 24Months
--------------------------	-------------------	---	----------------------

# LOVANCE<sup>LED</sup> Laser Blade Surface Light

Input voltage range: AC 85~265V 50/60Hz  
 Typical efficiency: >88%  
 IP rating: IP20  
 CRI: >90



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	BODY COLOR:
ML-SF253	16W	Cree	1650lm	PF≥0.95	NW/WW/WH	38°	82*82*80mm	PKW+BK



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	BODY COLOR:
ML-SF254	40W	CREE	4200lm	PF≥0.95	NW/WW/WH	38°	120*120*90mm	PKW/BK





## LED ZOOM LIGHT SERIES - LORENZO SERIES

LED BRAND <b>CREE</b>	BEAM ANGLE 38°	COLOR TEMP WH/NW/WW WW(3000k) NW(4000k) WH(6000k)	WARRANTY 24Months
--------------------------	-------------------	---	----------------------

# LORENZO<sup>LED</sup>



ZOOM LIGHT SERIES

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%


IP rating  
IP20

CRI:  
>90

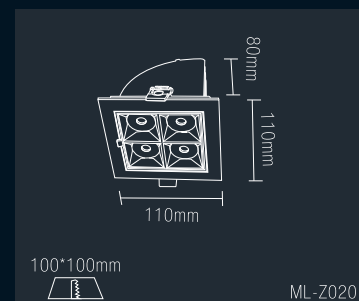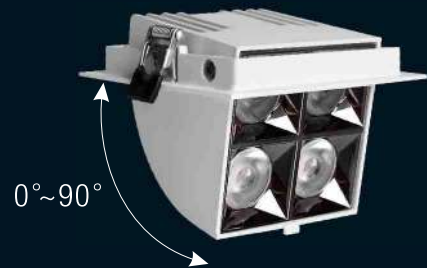


Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension	Cut-out:
ML-Z020	20W	CREE	2000lm	PF≥0.95	NW/WW/WH	38°	110*110*80mm	100*100mm

## Cob surface spot lighting systems

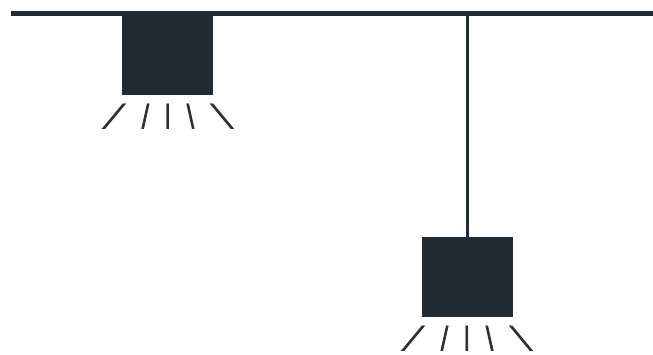



## COB SURFACE SPOT LIGHT- ESCADA SERIES

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	---	---------------------------------

Led Escada Series Surface mounted COB based Metal tubes/Cylinder/Cuboid lights with premium bridgelux chip delivering 80+ lumens/watt. Premium surge protection drivers to withstand voltage fluctuations and longer life. Deep recessed glare free lighting to create the best of cozy ambience. Various body color/reflector/ring options to suit your needs and match your interior aesthetics. Can be fixed to ceilings or suspended with premium suspension kits available in black & white finish. Sturdy built quality with built-in deattachable driver. Applications: Cafe, Malls, Homes, Offices, Lounges, Etc.



# ESCADA<sup>COB</sup> Surface Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

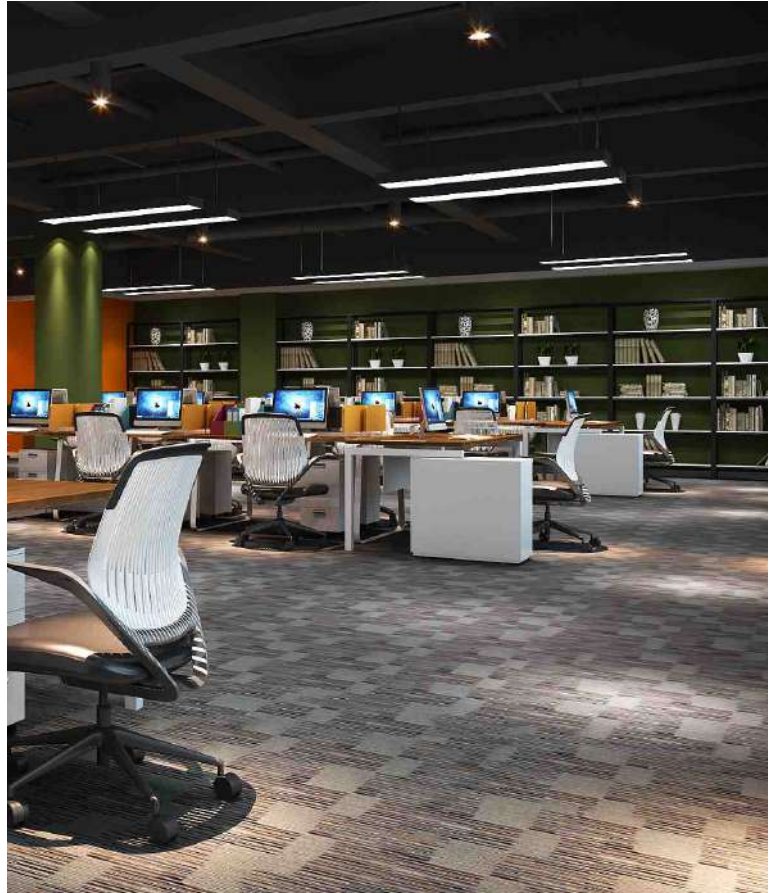

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-SF242	7W	Bridgelux	520-560lm	PF≥0.95	NW/WW/WH	38°	φ60*118mm
ML-SF243	12W	Bridgelux	920-960lm	PF≥0.95	NW/WW/WH	38°	φ70*148mm
ML-SF244	20W	Bridgelux	1550-1600lm	PF≥0.95	NW/WW/WH	38°	φ100*200mm

# ESCADA<sup>COB</sup> Surface Spot lights

Input voltage range: AC 85~265V 50/60Hz	Typical efficiency: >88%	IP rating IP20	CRI: >80
---	-----------------------------	-------------------	-------------

## Reflector Color:

- ROSE GOLD
- BLACK
- COPPER






Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-SF246RD	12W	Bridgelux	920-960lm	PF≥0.95	NW/WW	38°	φ73*100mm
ML-SF246B RD	12W	Bridgelux	920-960lm	PF≥0.95	NW/WW	38°	φ76*90mm
ML-SF247RD	20W	Bridgelux	1550-1600lm	PF≥0.95	NW/WW	38°	φ94*116mm

# ESCADA<sup>COB</sup> Surface Spot lights

Input voltage range: AC 85~265V 50/60Hz  
 Typical efficiency: >88%  
 IP rating: IP20  
 CRI: >80

Reflector Color:

- ROSE GOLD
- BLACK
- COPPER

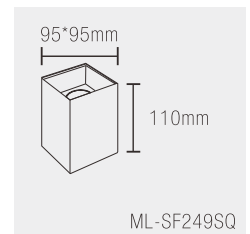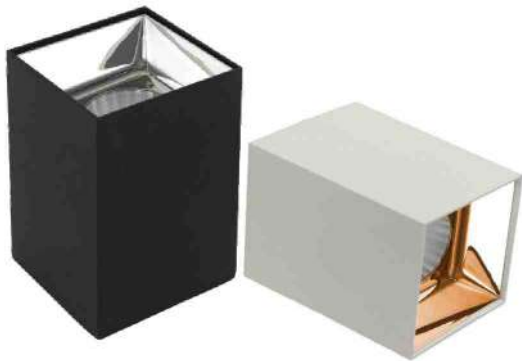

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-SF248SQ	12W	Bridgelux	920-960lm	PF≥0.95	NW/WW	38°	73*73*95mm
ML-SF249SQ	20W	Bridgelux	1550-1600lm	PF≥0.95	NW/WW	38°	95*95*110mm

# ESCADA COB Surface Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80








Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-SF250	12W	Bridgelux	1020lm	PF≥0.95	NW/WW/WH	40°	φ80*110mm





## EMPORIO SERIES

COB SURFACE SPOT LIGHT & HANGING SOFT LIGHT

 LED BRAND  POWER BY:	 BEAM ANGLE 38°	 COLOR TEMP WH/NW/WW WW(3000k) WN(4000k) WH(6000k)	 WARRANTY 24Months
--	--	--	---



# EMPORIO<sup>COB</sup> Surface Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP 65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-SF251	12W	Bridgelux	1450lm	PF≥0.95	NW/WW/WH	38°	φ80*165mm
ML-SF252	20W	Bridgelux	2300lm	PF≥0.95	NW/WW/WH	38°	φ100*200mm



# EMPORIO<sup>COB</sup> Hanging Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP 65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-SF251	12W	Bridgelux	1450lm	PF≥0.95	NW/WW/WH	38°	φ80*165mm
ML-SF252	20W	Bridgelux	2300lm	PF≥0.95	NW/WW/WH	38°	φ100*200mm

# LED DUST-PROOF TUBES SYSTEM




## LED DUST-PROOF TUBES- RENTA SERIES

<p>LED BRAND</p> <p><b>EPISTAR</b></p>	<p>BEAM ANGLE</p> <p>120° /135°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW WW[3000k] WN[4000k] WH[6000k]</p>	<p>WARRANTY</p> <p>24Months</p>
--	-------------------------------------	---	---------------------------------



High grade aluminum linear suspended light with aluminum hard pcb and 2.4kva surge protection driver. Can be surface mounted also. Deep body for perfect heat dissipation. Supreme PMMA acrylic for best diffusion of light. Highly used for decorating reception counters , supermarkets and commercial spaces. Comes bundled along with suspension kit. Applications: Supermarkets, Malls, Showrooms, Reception Desks, Etc

# RENTA<sup>LED</sup> Dust-proof Tubes




Input voltage range: AC 85~265V 50/60Hz	Typical efficiency: >88%	IP rating IP20	CRI: >80
---	-----------------------------	-------------------	-------------

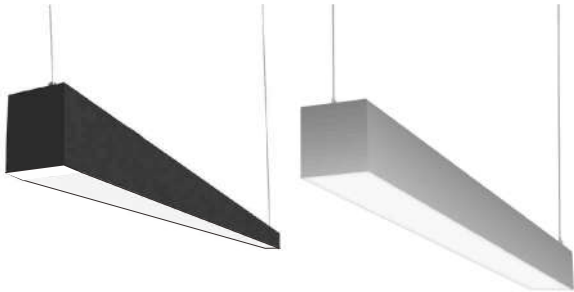

BODY COLOR:  
Black/White

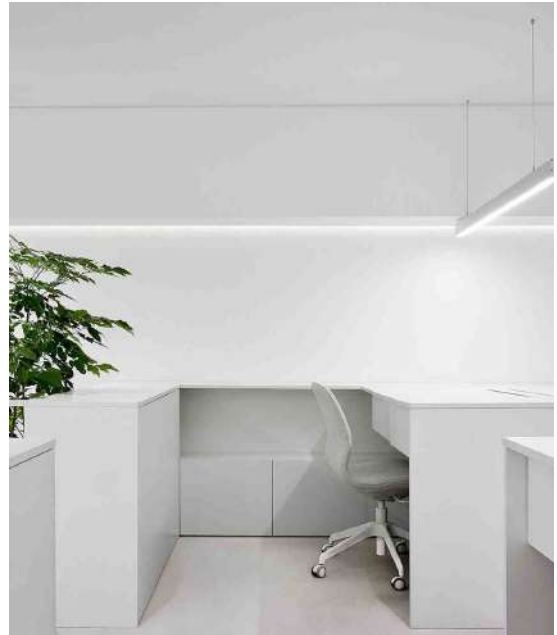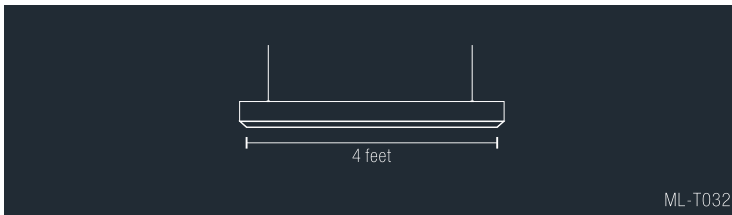

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-T032	36W	EPISTAR	3660lm	PF≥0.95	NW/WW/WH	120°	4feet

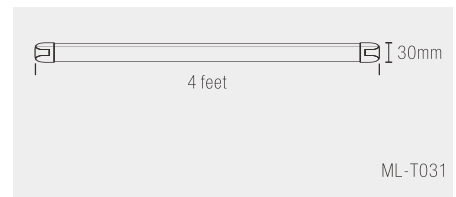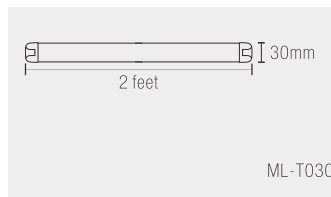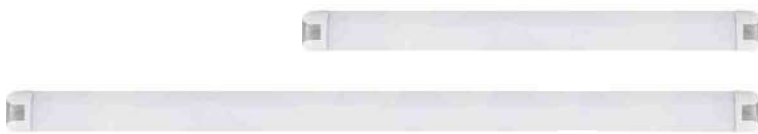

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-T030	18W	EPISTAR	1440lm	PF≥0.95	NW/WW/WH	135°	2feet
ML-T031	36W	EPISTAR	2880lm	PF≥0.95	NW/WW/WH	135°	4feet

# LED OFFICE & HANGING LIGHT SYSTEM





## LED DUST-PROOF TUBES- OFFICE LIGHT SERIES

<p>LED BRAND</p> <p><b>EPISTAR</b></p>	<p>BEAM ANGLE</p> <p><b>120°</b></p>	<p>COLOR TEMP</p> <p>WH/NW/WW WW(3000k) WN(4000k) WH(6000k)</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
--	--------------------------------------	---	--


# BRUNO<sup>COB</sup> Surface Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20



CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-H1001	48W	BRIDGELUX	4800lm	PF≥0.95	NW/WW/WH	110°	600*600mm



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-H1002	48W	BRIDGELUX	4800lm	PF≥0.95	NW/WW/WH	110°	600*600mm



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-H1003	48W	BRIDGELUX	4800lm	PF≥0.95	NW/WW/WH	110°	600*600mm





# CUBANO/CORINTO <sup>COB</sup> Surface Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20

CRI:  
>80

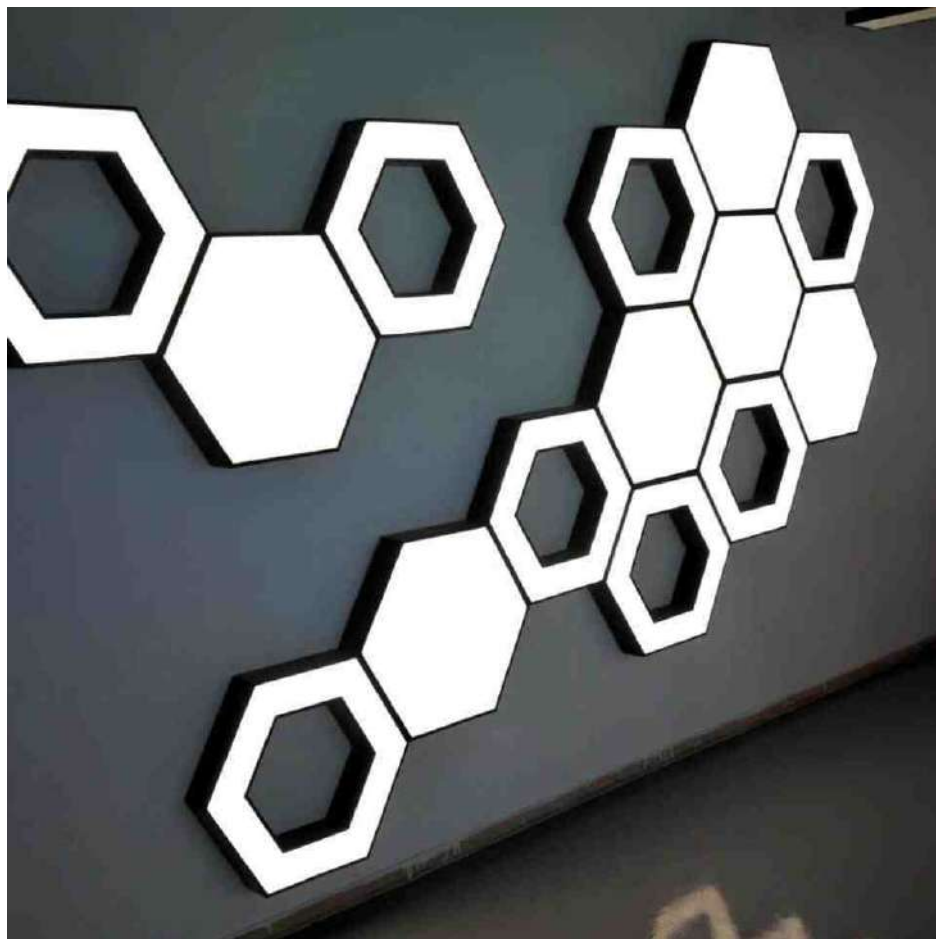

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-H1004	48W	BRIDGELUX	4800lm	PF≥0.95	NW/WW/WH	110°	600*600mm




Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-H1005	48W	BRIDGELUX	4800lm	PF≥0.95	NW/WW/WH	110°	600*600mm

# LED TRACK / WALL SPOT LIGHT SYSTEM





## LED TRACK SPOT LIGHT - AMOR SERIES

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>30°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[6000k] NW[4000k] HW[3000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

Premium finished track light with the perfect cylindrical shape to light up any environment. This fixture also enhances the look of any place its fit with its classy ergonomic design. Bundled with bridgelux chip of CRI >80 so the objects focused will look clearer & crisp than ever. Can be mounted on any 2 line track channel. Available in Matt Black & PKW body. Applications: Showrooms, Malls, Shopping Complex, Offices, Etc

# AMOR<sup>LED</sup> Track&Wall Spot lights

Input voltage range:

AC 85~265V  
50/60Hz

Typical efficiency:






>88%

IP rating

IP20

CRI:


>80

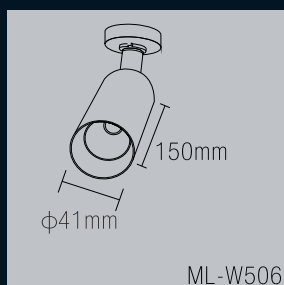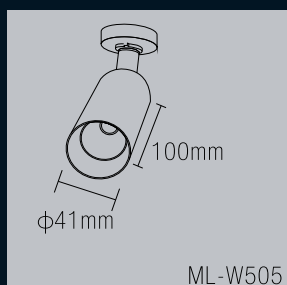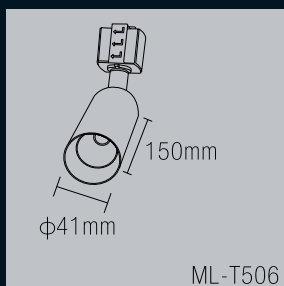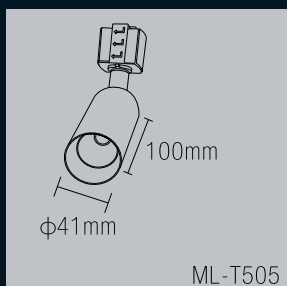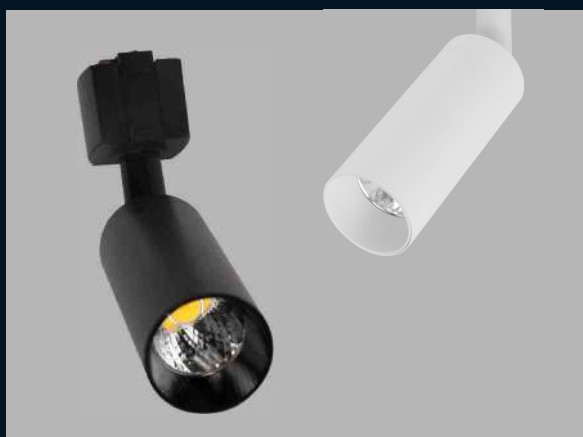

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-T505	6W	Bridgelux	610lm	PF≥0.95	NW/WW/WH	30°	φ41*100mm
ML-T506	9W	Bridgelux	1050lm	PF≥0.95	NW/WW/WH	30°	φ41*150mm
ML-W505	6W	Bridgelux	610lm	PF≥0.95	NW/WW/WH	30°	φ41*100mm
ML-W506	9W	Bridgelux	1050lm	PF≥0.95	NW/WW/WH	30°	φ41*150mm



## LED TRACK SPOT LIGHT - **AERIN SERIES**

<p>LED BRAND</p> 	<p>BEAM ANGLE</p> <p>38°</p>	<p>COLOR TEMP</p> <p>WH/NW/WW</p> <p>WW[3000k] NW[4000k] HW[3000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	------------------------------	--	---------------------------------

Led track light with premium shinland reflector and sand blasted matt anti-glare acrylic gives the perfection of light output. Latest CREE chip gives the best in class lumen output and CRI >90. Cylindrical aluminum body and small sized base makes it look as classy as ever. Can be easily mounted on 2 line track channel. Aesthetic design to match any environment. Driver surge protection upto 3.5KVA. Available in Matt Black & PKW body. Applications: Exclusive Stores, Retail Showrooms, Malls, Art Galleries, Etc


# AERIN<sup>LED</sup> Track & Wall Spot lights

Input voltage range:  
AC 85~265V  
50/60Hz


Typical efficiency:  
>88%

IP rating  
IP20


CRI:  
>80




ML-T510




ML-T511




ML-T512



ML-W510




ML-W511



ML-W512

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-T510	12W	CREE	1200lm	PF≥0.95	NW/WW/WH	38°	φ50*130mm
ML-T511	20W	CREE	2400lm	PF≥0.95	NW/WW/WH	38°	φ60*158mm
ML-T512	30W	CREE	3000lm	PF≥0.95	NW/WW/WH	38°	φ77*182mm
ML-W510	12W	CREE	1200lm	PF≥0.95	NW/WW/WH	38°	φ50*130mm
ML-W511	20W	CREE	2400lm	PF≥0.95	NW/WW/WH	38°	φ60*158mm
ML-W512	30W	CREE	3000lm	PF≥0.95	NW/WW/WH	38°	φ77*182mm

# LED ROPE LIGHT

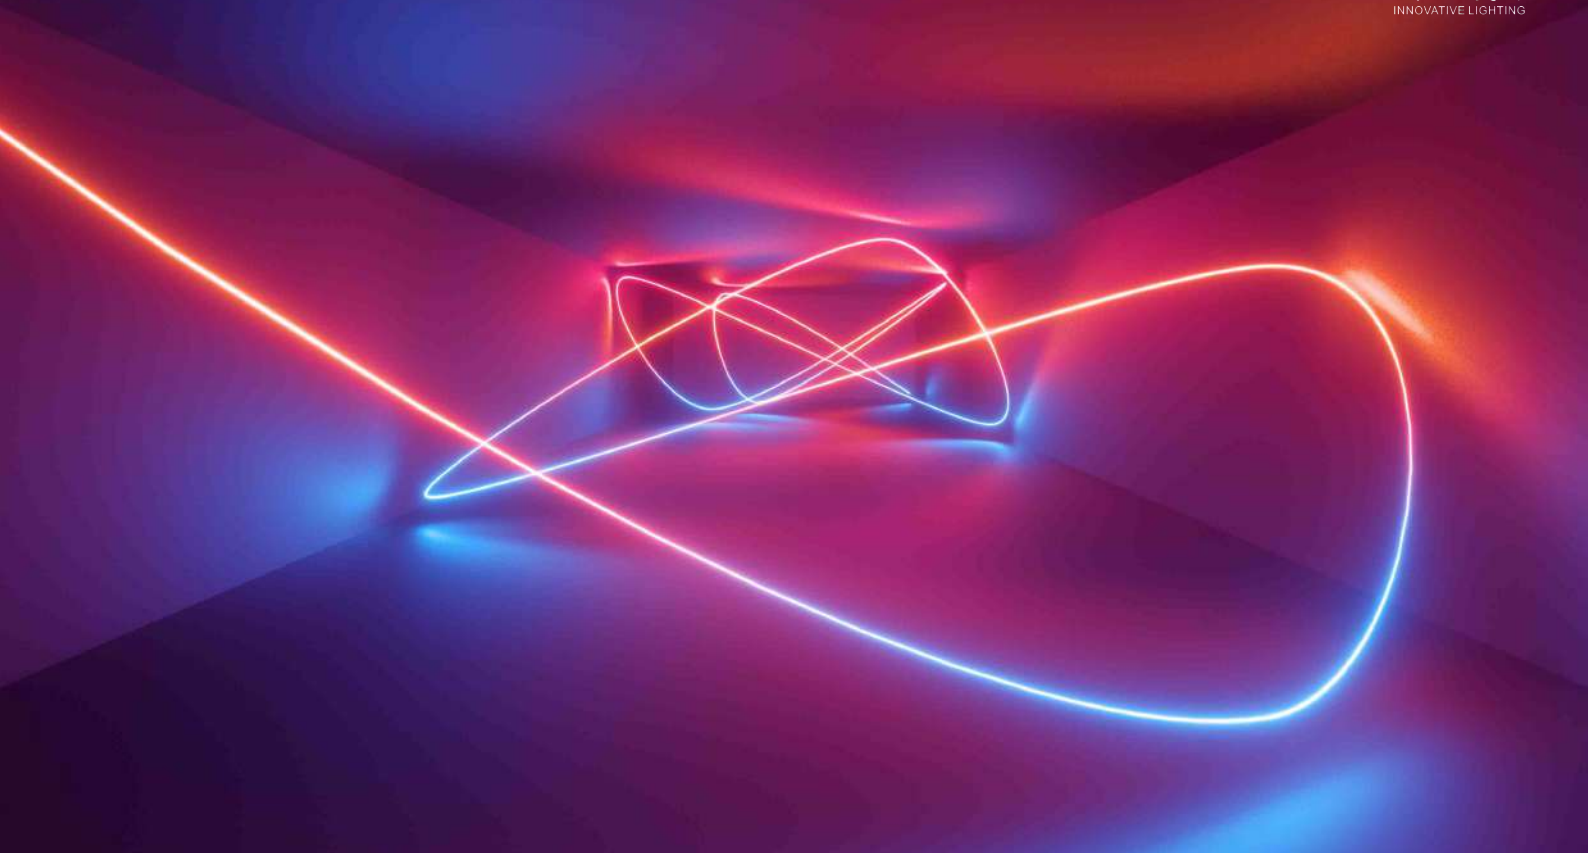

Color Available ○ ● ● ● ● ● ● NEON ROPELIGHT

Product Code	Power	Voltage	IP	Color Temp.	Dimension	Cut Size
2835	10W/mtr	12v	65	WH/WW/WN/BL/GR/RD	9*18mm	1 mtr
5050RGB	10W/mtr	12v	65	RGB	11*26mm	1 mtr



Color Available ○ ● ● ● ● ● ● SMD ROPELIGHT

Product Code	Power	Voltage	IP	Color Temp.	Dimension	Cut Size
2835-120L	10W/mtr	220v	65	WH/WW/WN/BL/GR/RD	14*7mm	every mtr
2835-120L	10W/mtr	220v	65	PINK	14*7mm	every mtr



# FLORA



Product Code	Power	Voltage	Color Temp.	LED
2835-60L	6W/mtr	12v	WH/WW/WN/BL/GR/RD	3Bulb
2835-60L	6W/mtr	12v	PK	3Bulb
2835-120L	12W/mtr	12v	WH/WW/WN/BL	3Bulb
2835-120L5mm	12W/mtr	12v	WH/WW/WN	3Bulb
2835-168L	16.8W/mtr	12v	WH/WW/WN/BL	3Bulb
2835-168L WP	16.8W/mtr	12v	WH/WW/WN	3Bulb
2835-240L	24W/mtr	12v	WH/WW/WN/BL	3Bulb
2835-360L	36W/mtr	12v	WH/WW/WN	9Bulb
2835-480	48W/mtr	12v	WH/WW/WN	15Bulb
5050-60L	14.4W/mtr	12v	WH/WW/WN/BL/GR/RD	3Bulb
5050-60L	14.4W/mtr	12v	PK/AMBER	3Bulb
5050-60L	14.4W/mtr	12v	RGB	3Bulb
5050 IP44	14.4W/mtr	12v	WH/WW/WN/BL	3Bulb
5050 IP44	14.4W/mtr	12v	RGB	3Bulb

# ARAMIS LAMPS



Product Code	Power	Color	Lumen	DIMENSION.	HOLUER.	BODY.	Bean Angle	WARRANTY.
ML-B201	4W	WW	380	45*80MM	E27	Amber Glass	300°	12MONTHS
ML-B202	4W	WW	380	35*121MM	E14	Amber Glass	300°	12MONTHS
ML-B203	4W	WW	380	35*100MM	E27/E14	Amber Glass	300°	12MONTHS

# ARAMIS LAMPS



Product Code	Power	Color	Lumen	DIMENSION.	HOLOER.	BODY.	Beam Angle	WARRANTY.
ML-B204	4W	WW	380	30*225MM	E27	Amber Glass	300°	12MONTHS
ML-B205	6W	WW	570	30*300MM	E27	Amber Glass	300°	12MONTHS
ML-B206	6W	WW	570	64*138MM	E27	Amber Glass	300°	12MONTHS
ML-B207	6W	WW	570	48*110MM	E27	Amber Glass	300°	12MONTHS
ML-B208	6W	WW	570	80*122MM	E27	Amber Glass	300°	12MONTHS
ML-B209	6W	WW	570	125*180MM	E27	Amber Glass	300°	12MONTHS
ML-B210	12W	WW/WH/3IN1	960	30*90MM	E27/E14	clear pc diffuser	300°	12MONTHS



## P.C. DRIVER



Product Code	Power	Output	PF	Dimension	Color	Warranty
ML-SD601	2Amps	12V DC	>0.95	66*44*24mm	PVC	12Months
ML-SD602	5Amps	12V DC	>0.95	103*53*34mm	PVC	12Months
ML-SD603	10Amps	12V DC	>0.95	137*54*37mm	PVC	12Months
ML-SD604	15Amps	12V DC	>0.95	143*68*43mm	PVC	12Months

# RGB TUNER.DRIVER



Product Code	Dimension	Color	Warranty
ML-R001	235*53*20mm	MATT A/L	12Months

# RGB CONTROLLER.DRIVER



Product Code	Dimension	Color	Warranty
ML-R002	90*62*25mm	BK	12Months

# RGB CONTROLLER.DRIVER



Product Code	Dimension	Color	Warranty
ML-R003	90*60*25mm	BK	12Months

# BRIGHTNESS TUNER.DRIVER



Product Code	Dimension	Color	Warranty
ML-R004	86*60*25mm	BK	12Months

# CANDY SERISE-S.M.P.S METAL DRIVER



Product Code	Power	Output	PF	Dimension	Color	Warranty
ML-SD593	2.1A/25W	12V DC	>0.95	80*48*20mm	Gunmetal Gray	12Months
ML-SD594	5A/60W	12V DC	>0.95	126*46*34mm	Gunmetal Gray	12Months
ML-SD595	8.5A/100W	12V DC	>0.95	187*46*34mm	Gunmetal Gray	12Months
ML-SD596	10A/120W	12V DC	>0.95	187*46*34mm	Gunmetal Gray	12Months
ML-SD597	12.5A/150W	12V DC	>0.95	200*60*36mm	Gunmetal Gray	12Months
ML-SD598	16.5A/200W	12V DC	>0.95	200*60*36mm	Gunmetal Gray	12Months
ML-SD599	20A/250W	12V DC	>0.95	223*70*40mm	Gunmetal Gray	12Months
ML-SD600	30A/360W	12V DC	>0.95	223*70*40mm	Gunmetal Gray	12Months

# CANDY SERISE-S.M.P.S METAL DRIVER



Product Code	Power	Output	PF	Dimension	Color	Warranty
ML-SD591	2A/24W	12V DC	>0.95	172*17*17mm	A/L Color	12Months
ML-SD592	5A/60W	12V DC	>0.95	294*17*17mm	A/L Color	12Months



Product Code	Power	Output	PF	Dimension	Color	Warranty
ML-SD587	12.5A/150W	12V DC	>0.95	235*53*20mm	MATT A/L	12Months
ML-SD588	16.7A/200W	12V DC	>0.95	308*53*20mm	MATT A/L	12Months



Product Code	Power	Output	PF	Dimension	Color	Warranty
ML-SD589	25A/300W	12V DC	>0.95	308*53*20mm	MATT A/L	12Months



# CANDY SERIES-OUTDOOR STRIP DRIVER




Product Code	Power	IP	Dimension	Color	Warranty
ML-SD590	5A/60W	67	173*46*35mm	Grey	12Months

# CANDY SERIES-OUTDOOR STRIP DRIVER




Product Code	Power	IP	Dimension	Color	Warranty
ML-SD591	10A/120W	67	203*46*35mm	Grey	12Months

# CANDY SERIES-OUTDOOR STRIP DRIVER

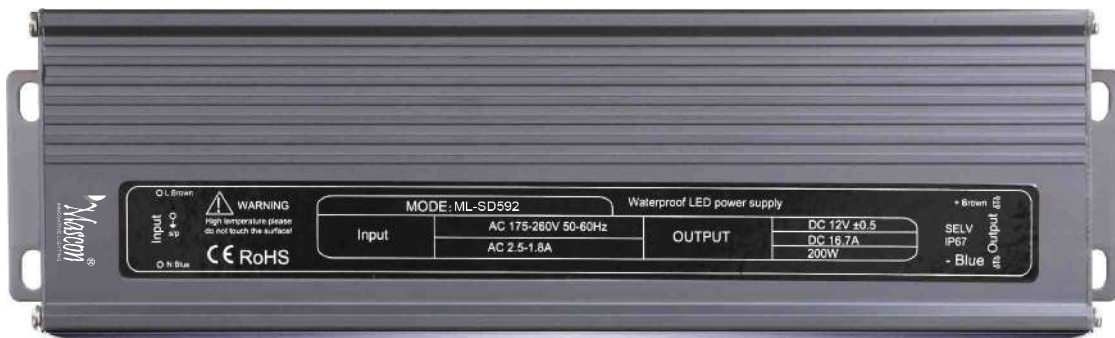

Product Code	Power	IP	Dimension	Color	Warranty
ML-SD592	16.5A/200W	67	235*66*45mm	Grey	12Months

# OUTDOOR LIGHTING SYSTEM

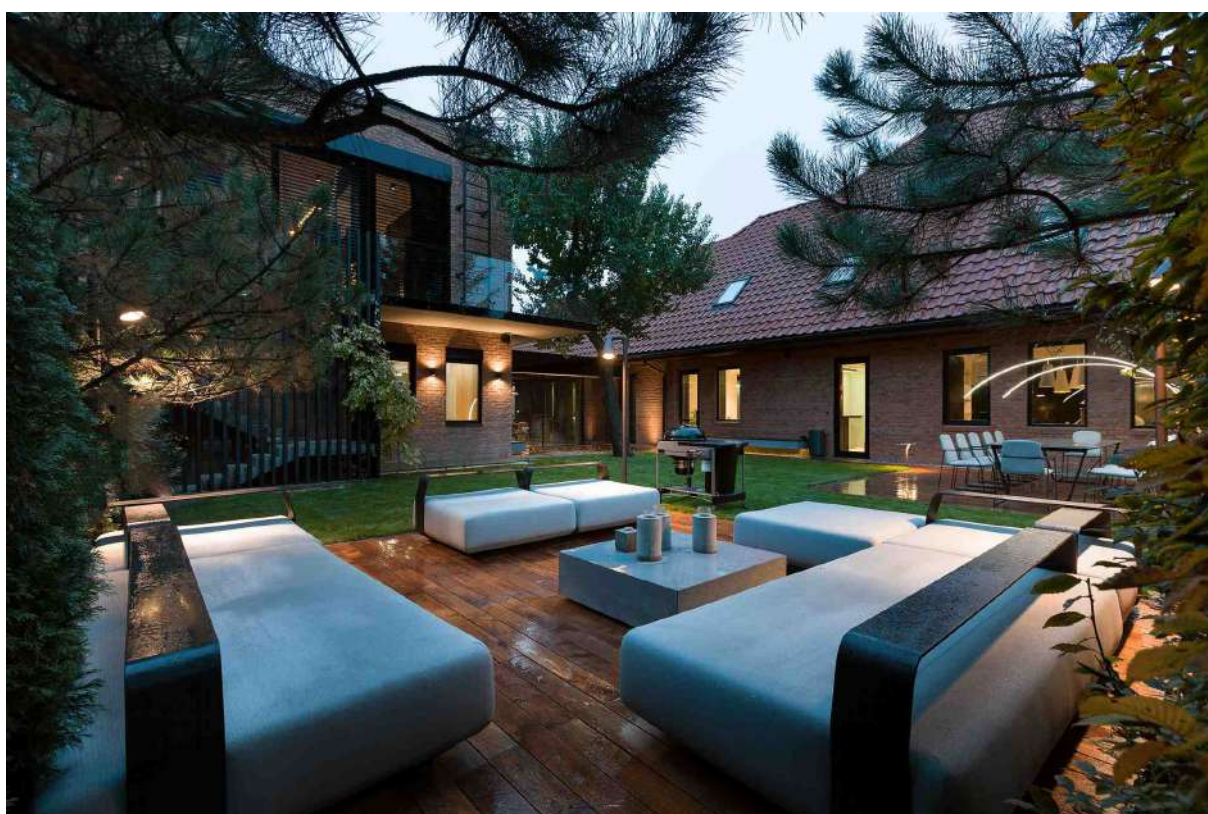

# LED FOOT LIGHT

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
≥83%

IP rating  
Ip65

CRI:  
>80


LED BRAND  POWER BY.	BODY COLOR <b>Flash Black</b>	COLOR TEMP <b>WW</b> WW[6000K]	WARRANTY <b>12Months</b>
---	----------------------------------	--------------------------------------	-----------------------------




ML-OD615



ML-OD611




ML-OD612



ML-OD615




ML-OD611




ML-OD612



ML-OD614




ML-OD616



ML-OD613



ML-OD614



ML-OD616



ML-OD613



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension
ML-OD611	3W	Bridgelux	240lm	PF≥0.65	WW	φ50*65mm
ML-OD612	3W	Bridgelux	240lm	PF≥0.65	WW	φ50*65mm
ML-OD613	3W	Bridgelux	240lm	PF≥0.65	WW	φ50*65mm
ML-OD614	3W	Bridgelux	240lm	PF≥0.65	WW	φ50*65mm
ML-OD615	3W	Bridgelux	240lm	PF≥0.65	WW	φ50*65mm
ML-OD616 (Rd/Sq)	1W	Bridgelux	90lm	PF≥0.65	WW	φ50*65mm



## LED OUTDOOR LIGHT - ROXIE SERIES


LED BRAND bridgeLux POWER BY:	BODY COLOR <b>Flash Black</b>	COLOR TEMP WW WW[3000k]	WARRANTY 24Months
-------------------------------------	----------------------------------	-------------------------------	----------------------

Input voltage range:  
AC 85~265V  
50/60Hz




Typical efficiency:  
>88%

IP rating  
Ip65


CRI:  
>80

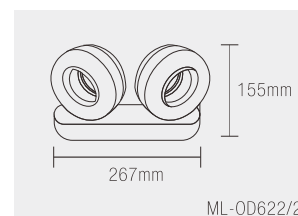

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD621/1	2*6W	Bridgelux	240lm	PF $\geq$ 0.65	WW	Flash Black	120*120*155mm
ML-OD621/2	12*2W	Bridgelux	240lm	PF $\geq$ 0.65	WW	Flash Black	155*65*267mm

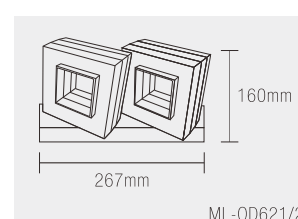

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD622/1	2*6W	Bridgelux	240lm	PF $\geq$ 0.65	WW	Flash Black	125*85*160mm
ML-OD622/2	12*2W	Bridgelux	240lm	PF $\geq$ 0.65	WW	Flash Black	160*70*267mm

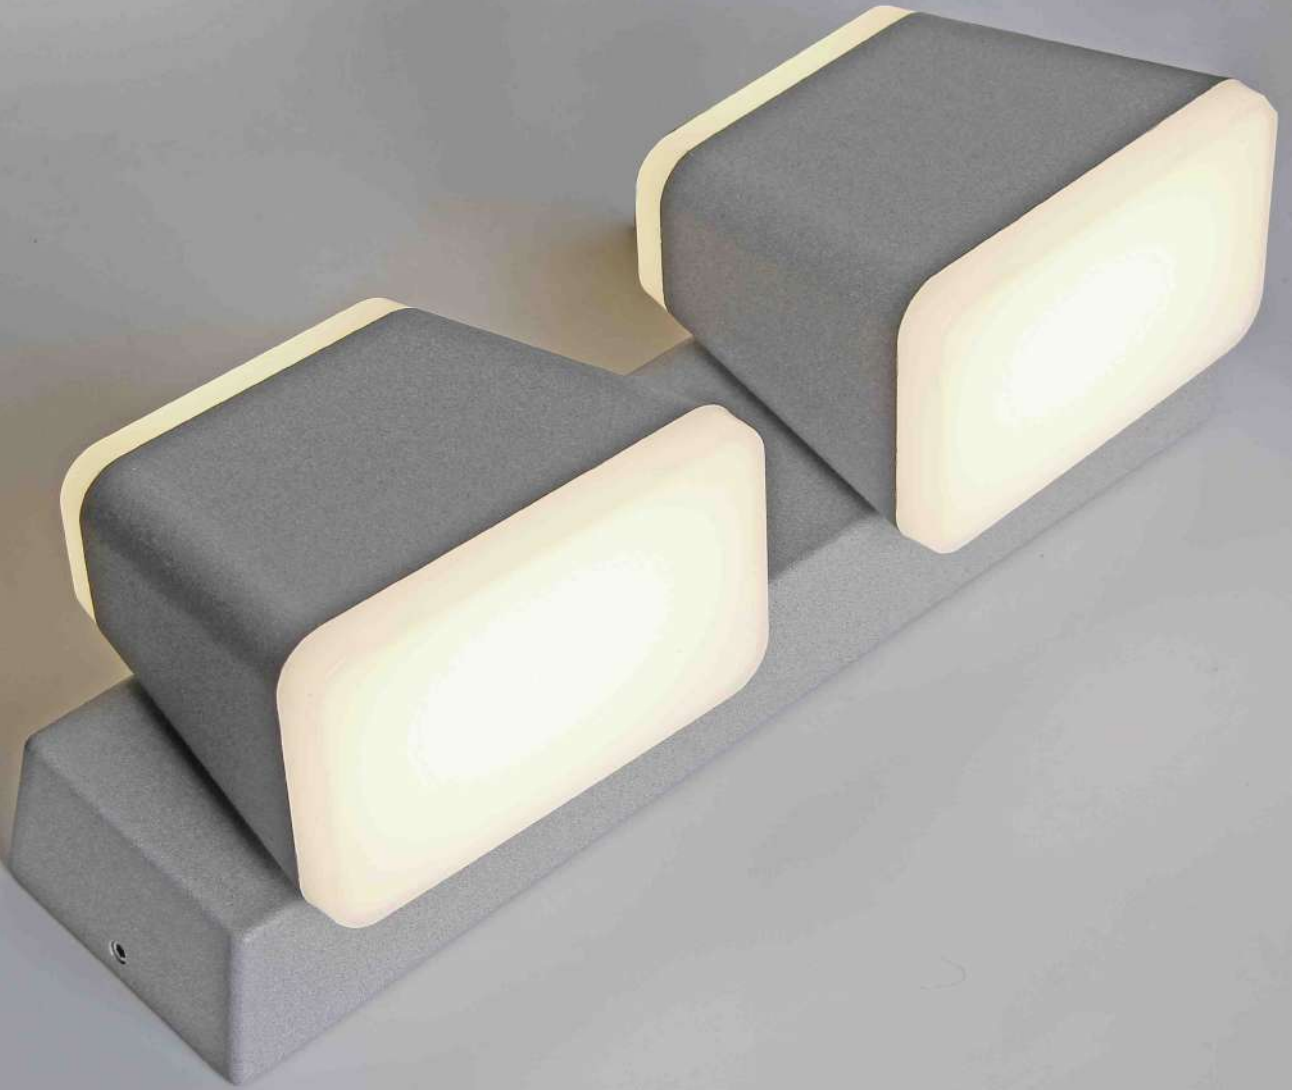

## OUTDOOR LIGHT- ESTEE SERIES

 LED BRAND  POWER BY	 BODY COLOR <b>Flash Black</b>	 COLOR TEMP WW WW[3000k]	 WARRANTY 24Months
---	---	--	---



# ESTEE<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz



Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD623/1	5+7W	Bridgelux	240lm	PF≥0.65	WW	Flash Black	105*85*125mm
ML-OD623/2	12*2W	Bridgelux	240lm	PF≥0.65	WW	Flash Black	105*105*267mm







Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD624/1	5+7W	Bridgelux	240lm	PF≥0.65	WW	Flash Black	120*120*125mm
ML-OD624/2	12*2W	Bridgelux	240lm	PF≥0.65	WW	Flash Black	125*85*267mm







## LED OUTDOOR LIGHT- TALMA SERIES

 LED BRAND  POWER BY	 BODY COLOR <b>Stone Grey</b>	 COLOR TEMP WW WW[3000k]	 WARRANTY 24Months
--	--	--	---

# TALMA<sup>LED</sup> Outdoor lights


Input voltage range: AC 85~265V 50/60Hz	Typical efficiency: >88%	IP rating Ip65	CRI: >80
---	-----------------------------	-------------------	-------------



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD625/RD	12W	Bridgelux	240lm	PF≥0.65	WW	Stone Grey	150*160*180mm
ML-OD625/SQ	12W	Bridgelux	240lm	PF≥0.65	WW	Stone Grey	170*180*200mm

# FUBU<sup>LED</sup> Outdoor lights


Input voltage range: AC 85~265V 50/60Hz	Typical efficiency: >88%	IP rating Ip65	CRI: >80
---	-----------------------------	-------------------	-------------




Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD639	4*3W	CREE	1200lm	PF≥0.65	WW	white	140*140*65mm



## LED OUTDOOR LIGHT- FLOAM SERIES

 LED BRAND  POWER BY	 BODY COLOR <b>Stone Grey</b>	 COLOR TEMP WW WW(3000k)	 WARRANTY 24Months
---	--	--	---

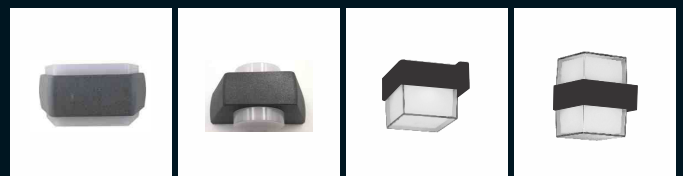



# FLOAM<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz



Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80

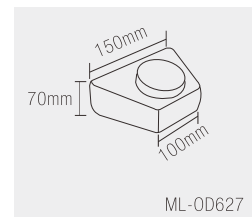


Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD626	5W	Bridgelux	240lm	PF≥0.65	WW	Flash black	150*100*70mm
ML-OD627	5W	Bridgelux	240lm	PF≥0.65	WW	Flash black	150*100*70mm

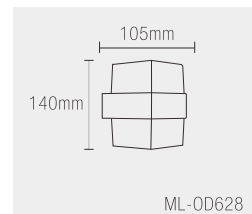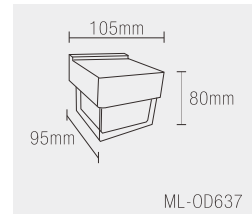

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD637	5W	Bridgelux	240lm	PF≥0.65	WW	Flash black	95*105*80mm
ML-OD638	2*5W	Bridgelux	240lm	PF≥0.65	WW	Flash black	950*105*140mm



## LED OUTDOOR LIGHT- ONAZI & JOVOY SERIES

<p>LED BRAND</p>  <p>POWER BY</p>	<p>BODY COLOR</p> <p><b>Stone Grey</b></p>	<p>COLOR TEMP</p> <p><b>WW</b> WW[3000k]</p>	<p>WARRANTY</p> <p><b>24 Months</b></p>
--	--	--	---



# ONAZI&JOVOY <sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%


IP rating  
Ip65

CRI:  
>80

Body Color  
Flash Black/Stone grey




Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body color	Dimension
ML-OD631	15W	Bridgelux	1500lm	PF≥0.65	WW	stone grey	260*165*40mm



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body color	Dimension
ML-OD630	10W	CREE	1100lm	PF≥0.65	WW	Flash Black	300*56*67mm




## LED OUTDOOR LIGHT- MEOW SERIES

<p>LED BRAND</p>  <p>POWER BY.</p>	<p>BODY COLOR</p> <p><b>Stone Grey</b></p>	<p>COLOR TEMP</p> <p>WW WW(3000k)</p>	<p>WARRANTY</p> <p>24Months</p>
---	--	---	---------------------------------




# MEOW<sup>LED</sup> Outdoor lights


Input voltage range: AC 85~265V 50/60Hz  
 Typical efficiency: >88%  
 IP rating: Ip65  
 CRI: >80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD628	2W	Bridgelux	240lm	PF≥0.65	WW	Stone Grey	φ110*19mm



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD629	2W	Bridgelux	240lm	PF≥0.65	WW	Stone Grey	105*105*22mm



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Body Color	Dimension
ML-OD634	8W	Bridgelux	240lm	PF≥0.65	WW	Flash black	φ190*70mm





## LED OUTDOOR LIGHT- LABO & HUGO SERIES

<p>LED BRAND</p> <p>bridge<i>lux</i> POWER BY</p>	<p>BODY COLOR</p> <p>Stone Grey</p>	<p>COLOR TEMP</p> <p>WW WW[3000k]</p>	<p>WARRANTY</p> <p>24Months</p>
---	-------------------------------------	---	---------------------------------



# LABO<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension	Body color:
ML-OD632	2*5W	Bridgelux	1100lm	PF≥0.65	WW	95*90*360mm	Stone Grey
ML-OD633	2*5W	Bridgelux	1100lm	PF≥0.65	WW	130*70*124mm	Stone Grey




# HUGO<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension	Body color:
ML-OD635	2*4W	Bridgelux	800lm	PF≥0.65	WW	125*42*250mm	Stone Grey
ML-OD636	2*4W	Bridgelux	800lm	PF≥0.65	WW	φ180*40mm	Stone Grey


# ETRO<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension
ML-OD619	12W	EPISTAR	1200lm	PF≥0.9	WW/WH	95*35mm
ML-OD620	15W	EPISTAR	1500lm	PF≥0.9	WW/WH	φ184*65mm



## LED OUTDOOR LIGHTZOLTAN/FANDISI/SEPHORA/LAMOUR SERIES

LED BRAND bridge <b>lux</b> POWER BY	BODY COLOR <b>Stone Grey</b>	COLOR TEMP WW WW(3000k)	WARRANTY 24Months
--	---------------------------------	-------------------------------	----------------------


# ZOLTAN<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension	BODY COLOR
ML-OD691	12W	EPISTAR SMD	1200lm	PF≥0.65	WW	222*222*600mm	Flash Black


# FANDISI<sup>LED</sup> Outdoor lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
IP65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension	BODY COLOR
ML-OD692	2*5W	CREE	1000lm	PF≥0.65	WW	170*100*600mm	Flash Black

# SEPHORA<sup>LED</sup> Outdoor lights

Input voltage range:

AC 85~265V  
50/60Hz

Typical efficiency:


>88%

IP rating

IP65

CRI:

>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension	BODY COLOR
ML-OD693	7W	CREE	240lm	PF≥0.65	WW	120*120*600mm	Flash Black

# LAMOUR<sup>LED</sup> Outdoor lights

Input voltage range:

AC 85~265V  
50/60Hz

Typical efficiency:


>88%

IP rating

IP65

CRI:

>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Dimension	BODY COLOR
ML-OD694	9+5W	Bridgelux	240lm	PF≥0.65	WW	140*600mm	Stone Grey



## LED FLOOD LIGHT- CONTESSA SERIES

<p>LED BRAND</p> <p><b>Epiled SMD</b></p>	<p>BEAM ANGLE</p> <p><b>120°</b></p>	<p>COLOR TEMP</p> <p>WH/WW/GR WW(3000k) WH(6000k)</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
---	--------------------------------------	---	--

High grade aluminum linear suspended light with aluminum hard pcb and 2.4kva surge protection driver. Can be surface mounted also. Deep body for perfect heat dissipation. Supreme PMMA acrylic for best diffusion of light. Highly used for decorating reception counters, supermarkets and commercial spaces. Comes bundled along with suspension kit. Applications: Supermarkets, Malls, Showrooms, Reception Desks, Etc






# CONTESSA<sup>LED</sup> Flood lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80

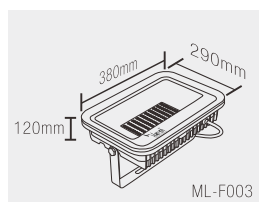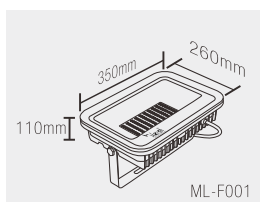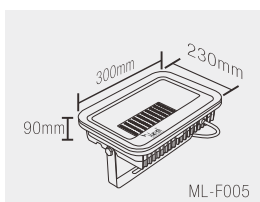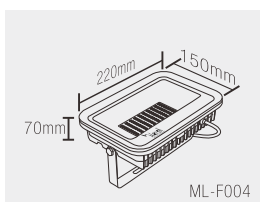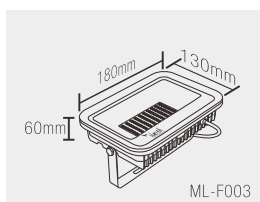

Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-F003	30W	EpiLED SMD	3300lm	PF≥0.95	WH/WW/GR	120°	180*60*130mm
ML-F004	50W	EpiLED SMD	5500lm	PF≥0.95	WH/WW/GR	120°	220*70*150mm
ML-F005	100W	EpiLED SMD	11000lm	PF≥0.95	WH/WW	120°	300*90*230mm
ML-F001	200W	EpiLED SMD	22000lm	PF≥0.95	WH/WW	120°	350*110*260mm
ML-F002	300W	EpiLED SMD	31000lm	PF≥0.95	WH/WW	120°	380*120*290mm



## LED UFO LIGHT- CAPUCCI SERIES

<p>LED BRAND</p> <p><b>EPISTAR</b></p>	<p>BEAM ANGLE</p> <p><b>90°</b></p>	<p>COLOR TEMP</p> <p>WH/WW/GR</p> <p>WH[6500k]</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
--	-------------------------------------	--	--






# CAPUCCI<sup>LED</sup> UFO lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-F011	100W	EPISTAR	11000lm	PF≥0.95	WH	90°	φ275*39mm
ML-F012	150W	EPISTAR	16500lm	PF≥0.95	WH	90°	φ320*40mm
ML-F013	200W	EPISTAR	22000lm	PF≥0.95	WH	90°	φ350*43mm



## LED STREET LIGHT- CABOTINE SERIES

<p>LED BRAND</p> <p><b>EPISTAR</b></p>	<p>BEAM ANGLE</p> <p><b>120°</b></p>	<p>COLOR TEMP</p> <p><b>WH</b> WH[6000k]</p>	<p>WARRANTY</p> <p><b>24Months</b></p>
--	--------------------------------------	--	--

High grade aluminum linear suspended light with aluminum hard pcb and 2.4kva surge protection driver. Can be surface mounted also. Deep body for perfect heat dissipation. Supreme PMMA acrylic for best diffusion of light. Highly used for decorating reception counters , supermarkets and commercial spaces. Comes bundled along with suspension kit. Applications: Supermarkets, Malls, Showrooms, Reception Desks, Etc


# CABOTINE<sup>LED</sup> Street lights

Input voltage range:  
AC 85~265V  
50/60Hz

Typical efficiency:  
>88%

IP rating  
Ip65

CRI:  
>80



Product Code	Wattage	Led Brand	Lumen	PF	Color Temp.	Beam Angle	Dimension
ML-F007	20W	EPISTAR	1980lm	PF≥0.95	WH	120°	281*115*35mm
ML-F008	30W	EPISTAR	2970lm	PF≥0.95	WH	120°	310*122*45mm
ML-F009	50W	EPISTAR	4950lm	PF≥0.95	WH	120°	398*138*40mm
ML-F010	100W	EPISTAR	9900lm	PF≥0.95	WH	120°	530*185*50mm

# Aluminum Profile




Product Code	Dimension	Length	Body	Description
ML-P301	24.7*7mm	2mtr	Matt Alu	Regular Recessed
ML-P302	17.4*7mm	2mtr	Matt Alu	Regular Surface
ML-P303	15.8*15.8mm	2mtr	Matt Alu	Corner Profile
ML-P304	17.4*12.1mm	2mtr	Matt Alu	Deep Surface
ML-P305	13.2*7mm	2mtr	Matt Alu	Slim Surface
ML-P306	7.5*6mm	2mtr	Matt Alu	Ultra-Slim Surface
ML-P307	29.5*15mm	2mtr	Matt Alu	Hanger Profile
ML-P308	13.26*15.65mm	2mtr	Matt Alu	Surface Round
ML-P309	21.3*25.8mm	2mtr	Matt Alu	Inground
ML-P310	43.6*34.8mm	2mtr	Matt Alu	Big Recessed
ML-P311	35*34.8mm	2mtr	Matt Alu	Big Surface
ML-P312	49.18*75mm	2mtr	Matt Alu	Linear Hanging
ML-P313	64.18*35mm	2mtr	Matt Alu	POP Recessed
ML-P314	75.2*35mm	2mtr	Matt Alu	Big POP Recessed
ML-P315	53.5*26.6mm	2mtr	Matt Alu	Steps
ML-P316	40.8*18mm	2mtr	Matt Alu	Wall Washer
ML-P317	35*48.6mm	2mtr	Matt Alu	Deep Recessed
ML-P318	48.6*17.6mm	2mtr	Matt Alu	2-Way Washer
ML-P319	76.5*26.2mm	2mtr	Matt Alu	Wall Recessed
ML-P320	44*35mm	2mtr	Matt Alu	POP Recessed
ML-P321	23.5*9.8mm	2mtr	Matt Alu	1INCH Surface
ML-P322	30.3*9.8mm	2mtr	Matt Alu	1INCH Recessed
ML-P323	12*9mm	2mtr	Matt Alu	Recessed
ML-P324	50*32mm	2mtr	Matt Alu	Surface/Hanging
ML-P325	36*27.6mm	2mtr	Matt Alu	Recessed
ML-P326	20*11	2mtr	Matt Alu	Surface/hanging
ML-P327	15*6	2mtr	Matt Alu	2inch Surface/hanging
ML-P328	24.5*12.2	2mtr	Matt Alu	Recessed
ML-P329	13*10	2mtr	Matt Alu	Surface

# Aluminum Profile




ML-P301

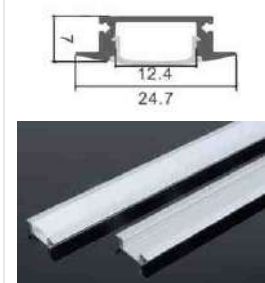


Dimension	Application	Standard Length
24.7*7	17mm Recessed	2mtr

ML-P302

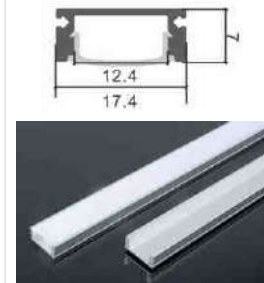


Dimension	Application	Standard Length
17.4*7	17mm Surface	2mtr

ML-P303

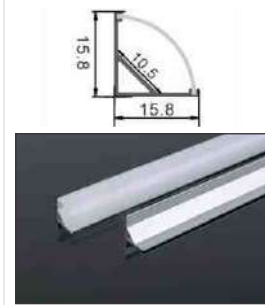

Dimension	Application	Standard Length
15.8*15.8	Corner Profile	2mtr

ML-P304

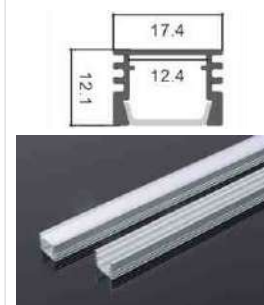

Dimension	Application	Standard Length
17.4*12.1	Deep Surface	2mtr

# Aluminum Profile




**ML-P305**



Dimension	Application	Standard Length
13.2*7	13mm Surface	2mtr

**ML-P306**

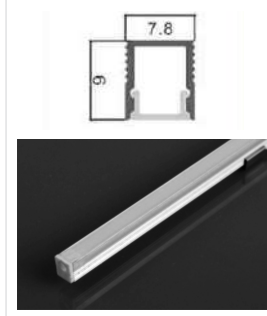


Dimension	Application	Standard Length
7.5*6	5mm Surface	2mtr

**ML-P307**




Dimension	Application	Standard Length
29.5*15	Hanger Profile	2mtr

**ML-P308**

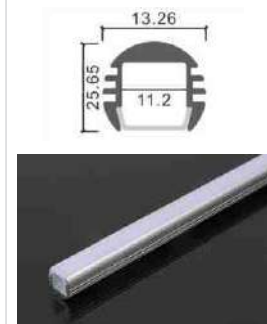


Dimension	Application	Standard Length
13.26*15.65	Surface Round	2mtr

# Aluminum Profile

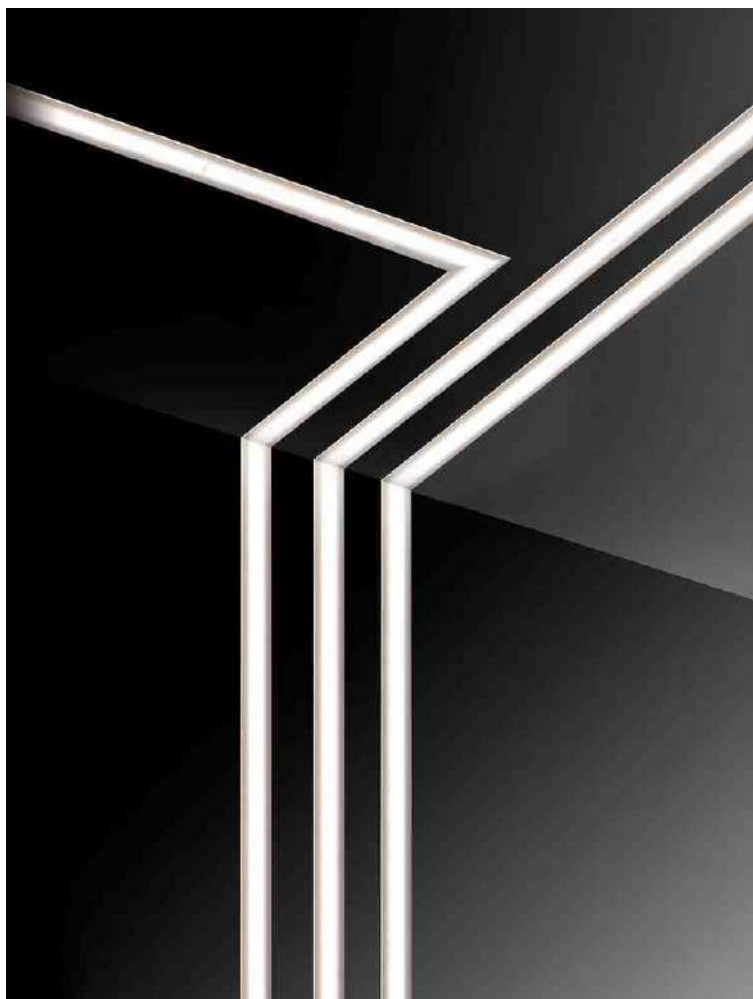


**ML-P309**

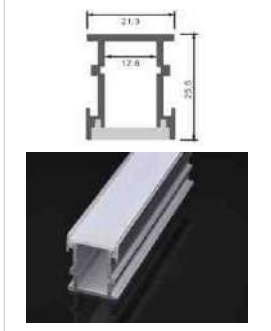


Dimension	Application	Standard Length
21.3*25.8	Inground	2mtr

**ML-P310**

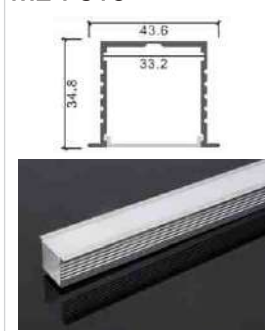


Dimension	Application	Standard Length
43.6*34.8	35mm Recessed	2mtr

**ML-P311**

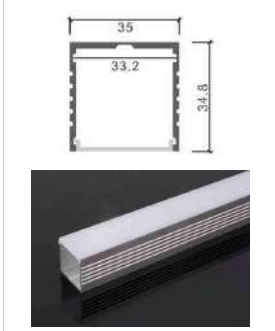

Dimension	Application	Standard Length
35*34.8	35mm Surface	2mtr

**ML-P312**


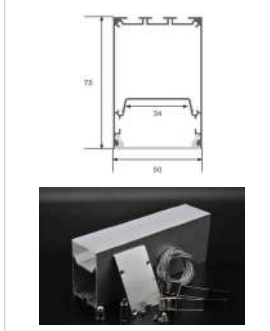


Dimension	Application	Standard Length
49.18*75	Linear Hanging	2mtr

# Aluminum Profile




**ML-P313**




Dimension	Application	Standard Length
64.18*35	2inch Recessed	2mtr

**ML-P314**





Dimension	Application	Standard Length
75.2*35	3inch Recessed	2mtr

**ML-P313**



Dimension	Application	Standard Length
53.5*26.6	Steps	2mtr


**ML-P316**




Dimension	Application	Standard Length
40.8*18	Wall Wsaher	2mtr




# Aluminum Profile

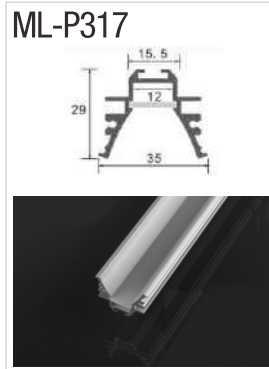


Dimension	Application	Standard Length
35*48.6	Deep Recessed	2mtr

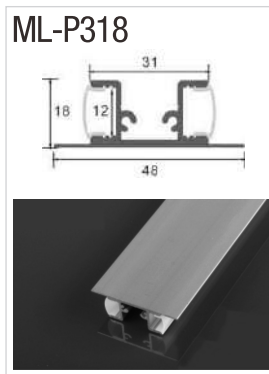

Dimension	Application	Standard Length
48.6*17.6	2-way Washer	2mtr

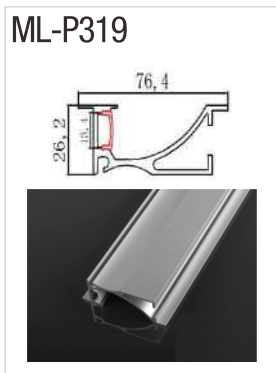

Dimension	Application	Standard Length
76.5*26.2	Wall Recessed	2mtr

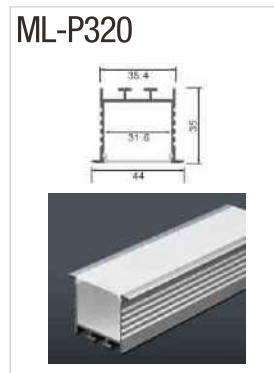


Dimension	Application	Standard Length
44*35	35mm Recessed	2mtr

# Aluminum Profile




**ML-P321**




Dimension	Application	Standard Length
23.5*9.8	1inch Surface	2mtr

**ML-P322**





Dimension	Application	Standard Length
30.3*9.8	1inch Recessed	2mtr

**ML-P323**



Dimension	Application	Standard Length
12*9	5mm Recessed	2mtr

**ML-P324**




Dimension	Application	Standard Length
50*32	2inch Surface/hanging	2mtr

# Aluminum Profile



**ML-P325**

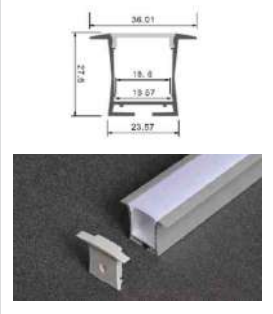

Dimension	Application	Standard Length
36*27.6	1 inch Recessed	2mtr




**ML-P326**




Dimension	Application	Standard Length
20*11	Surface/hanging	2mtr


# Aluminum Profile

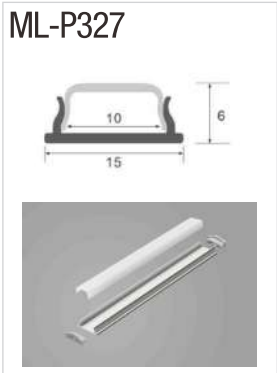


Dimension	Application	Standard Length
15*6	2inch Surface/hanging	2mtr

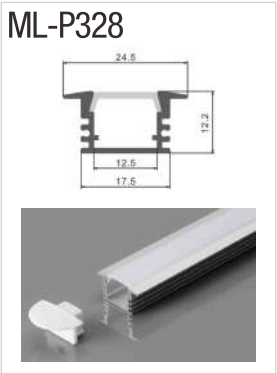

Dimension	Application	Standard Length
24.5*12.2	Recessed	2mtr

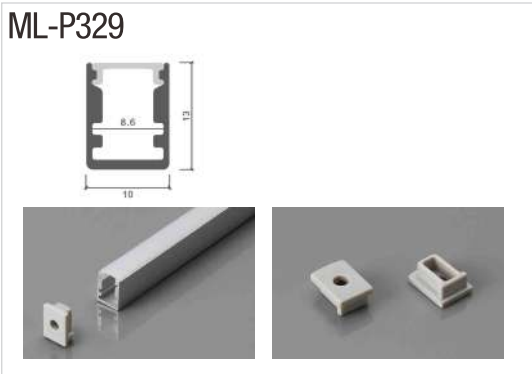

Dimension	Application	Standard Length
13*10	Surface	2mtr

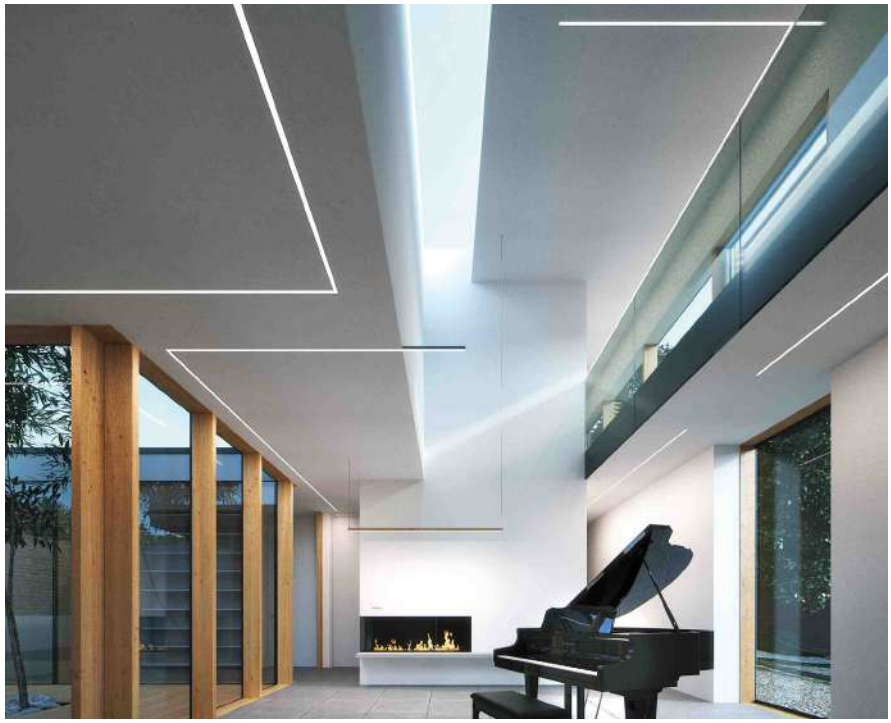

Note:



A series of horizontal dotted lines for taking notes, starting below the 'Note:' label and extending across the width of the page.



# Program

Indoor area  
Outdoor area

2019 edition



Architectural Lighting